SENTINEL HOLDING
INSTITUT

SHI PRODUCT PASSPORT

Find products. Certify buildings.

SHI Product Passport No.:

13373-10-1028

EPDM-Dichtband Außen SK

Product group: Sealing tapes - Windows

WÜRTH

Adolf Würth GmbH & Co. KG
Reinhold-Würth-Straße 12-17
74653 Künzelsau-Gaisbach

Product qualities:

- SHI Product Assessment 2024
- QNG Qualitätssiegel Nachhaltiges Gebäude
- DGNB NEW CONSTRUCTION 2023
- DGNB NEW CONSTRUCTION 2018
- BNB-BN NEUBAU V2015
- EU taxonomy
- BREEAM DE NEUBAU 2018
- LEED v4.1 (outside US)

CERTIFIED SUSTAINABLE PRODUCT
SHI PRODUCT PASSPORT
SENTINEL HOLDING INSTITUT
www.sentinel-holding.eu

Köttner

Helmut Köttner
Scientific Director
Freiburg, 19 May 2026

Product:
EPDM-Dichtband Außen SK

SHI Product Passport no.:
13373-10-1028

WÜRTH

Contents

SHI Product Assessment 2024	1
QNG - Qualitätssiegel Nachhaltiges Gebäude	2
DGNB New Construction 2023	3
DGNB New Construction 2018	4
BNB-BN Neubau V2015	5
EU taxonomy	6
BREEAM DE Neubau 2018	7
LEED v4.1	8
Product labels	9
Legal notices	10
Technical data sheet/attachments	11

The SHI Database is the first and only database for construction products whose comprehensive processes and data accuracy are regularly verified by the independent auditing company SGS-TÜV Saar

SENTINEL HOLDING
INSTITUT

Product:
EPDM-Dichtband Außen SK

SHI Product Passport no.:
13373-10-1028

WÜRTH

SHI Product Assessment 2024

Since 2008, Sentinel Holding Institut GmbH (SHI) has been establishing a unique standard for products that support healthy indoor air. Experts carry out independent product assessments based on clear and transparent criteria. In addition, the independent testing company SGS regularly audits the processes and data accuracy.

Criteria	Product category	Harmful substance limit	Assessment
SHI Product Assessment	Other products	TVOC ≤ 300 µg/m^3 Formaldehyd ≤ 24 µg/m^3	Indoor Air Quality Certified
Valid untill: 24 March 2028			

SENTINEL HOLDING
INSTITUT

Product:
EPDM-Dichtband Außen SK

SHI Product Passport no.:
13373-10-1028

WÜRTH

QNG - Qualitätssiegel Nachhaltiges Gebäude

The Qualitätssiegel Nachhaltiges Gebäude (Quality Seal for Sustainable Buildings), developed by the German Federal Ministry for Housing, Urban Development and Building (BMWSB), defines requirements for the ecological, socio-cultural, and economic quality of buildings. The Sentinel Holding Institut evaluates construction products in accordance with QNG requirements for certification and awards the QNG ready label. Compliance with the QNG standard is a prerequisite for eligibility for the KfW funding programme. For certain product groups, the QNG currently has no specific requirements defined. Although classified as not assessment-relevant, these products remain suitable for QNG-certified projects.

Criteria	Pos. / product group	Considered substances	QNG assessment
3.1.3 Schadstoffvermeidung in Baumaterialien			QNG ready - Not relevant for assessment

SENTINEL HOLDING
INSTITUT

Product:
EPDM-Dichtband Außen SK

SHI Product Passport no.:
13373-10-1028

WÜRTH

DGNB New Construction 2023

The DGNB System (German Sustainable Building Council) assesses the sustainability of various types of buildings. It can be applied to both large-scale private and commercial projects as well as smaller residential buildings. The 2023 version sets high standards for ecological, economic, socio-cultural, and functional aspects throughout the entire life cycle of a building.

Criteria	No. / Relevant building components / construction materials / surfaces	Considered substances / aspects	Quality level
ENV 1.2 Local environmental impact, 03.05.2024 (3rd edition)	not applicable		Not relevant for assessment

Criteria	Assessment
SOC1.2 Indoor air quality (*)	May positively contribute to the overall building score
Verification: SHI Schadstoffgeprüft	

Criteria	No. / Relevant building components / construction materials / surfaces	Considered substances / aspects	Quality level
ENV 1.2 Local environmental impact, 29.05.2025 (4th edition)	not applicable		Not relevant for assessment

SENTINEL HOLDING
INSTITUT

Product:
EPDM-Dichtband Außen SK

SHI Product Passport no.:
13373-10-1028

WÜRTH

DGNB New Construction 2018

The DGNB System (German Sustainable Building Council) assesses the sustainability of various types of buildings. It can be applied to both large-scale private and commercial projects as well as smaller residential buildings.

Criteria	No. / Relevant building components / construction materials / surfaces	Considered substances / aspects	Quality level
ENV 1.2 Local environmental impact	not applicable	not applicable	Not relevant for assessment

SENTINEL HOLDING
INSTITUT

Product:
EPDM-Dichtband Außen SK

SHI Product Passport no.:
13373-10-1028

WÜRTH

BNB-BN Neubau V2015

The Bewertungssystem Nachhaltiges Bauen (Assessment System for Sustainable Building) is a tool for evaluating public office and administrative buildings, educational facilities, laboratory buildings, and outdoor areas in Germany. The BNB was developed by the former Federal Ministry for the Environment, Nature Conservation, Building and Nuclear Safety (BMUB) and is now overseen by the Federal Ministry for Housing, Urban Development and Building (BMWSB).

Criteria	Pos. / product type	Considered substance group	Quality level
1.1.6 Risiken für die lokale Umwelt			Not relevant for assessment

SENTINEL HOLDING
INSTITUT

Product:
EPDM-Dichtband Außen SK

SHI Product Passport no.:
13373-10-1028

WÜRTH

EU taxonomy

The EU Taxonomy classifies economic activities and products according to their environmental impact. At the product level, the EU regulation defines clear requirements for harmful substances, formaldehyde and volatile organic compounds (VOCs). The Sentinel Holding Institut GmbH labels qualified products that meet this standard.

Criteria	Product type	Considered substances	Assessment
DNSH - Pollution prevention and control		Substances according to Annex C	EU taxonomy compliant
Verification: für SVHC < 0,1% und Stoffe mit Einstufung CMR 1A / 1B < 0,1% durch Herstellererklärung Fa. BOSIG vom 23.07.2024.			

SENTINEL HOLDING
INSTITUT

Product:
EPDM-Dichtband Außen SK

SHI Product Passport no.:
13373-10-1028

WÜRTH

BREEAM DE Neubau 2018

BREEAM (Building Research Establishment Environmental Assessment Methodology) is a UK-based building assessment system that evaluates the sustainability of new constructions, refurbishments, and conversions. Developed by the Building Research Establishment (BRE), the system aims to assess and improve the environmental, economic, and social performance of buildings.

Criteria	Product category	Considered substances	Quality level
Hea 02 Indoor Air Quality			Not relevant for assessment

SENTINEL HOLDING
INSTITUT

Product:
EPDM-Dichtband Außen SK

SHI Product Passport no.:
13373-10-1028

WÜRTH

LEED v4.1

LEED (Leadership in Energy and Environmental Design) is an internationally recognised building certification system developed by the U.S. Green Building Council. It is one of the most widely used sustainability standards for buildings worldwide and is particularly applied in internationally oriented projects. LEED assesses buildings holistically across categories such as energy efficiency, resource conservation, material selection, indoor environmental quality and site sustainability. Depending on the number of points achieved, projects are awarded one of the certification levels: LEED Certified, Silver, Gold or Platinum.

Criteria	Product category	Considered substances	Assessment
EQ Credit: Low-Emitting Materials			Not relevant for assessment

Product:
EPDM-Dichtband Außen SK

SHI Product Passport no.:
13373-10-1028

WÜRTH

Product labels

In the construction industry, high-quality materials are crucial for a building's indoor air quality and sustainability. Product labels and certificates offer guidance to meet these requirements. However, the evaluation criteria of these labels vary, and it is important to carefully assess them to ensure products align with the specific needs of a construction project.

Products bearing the Sentinel Holding Institute QNG-ready seal are suitable for projects aiming to achieve the "Qualitätssiegel Nachhaltiges Gebäude" (Quality Seal for Sustainable Buildings). QNG-ready products meet the requirements of QNG Appendix Document 3.1.3, "Avoidance of Harmful Substances in Building Materials." The KfW loan program Climate-Friendly New Construction with QNG may allow for additional funding.

This product is SHI Indoor Air Quality certified and recommended by Sentinel Holding Institut. Indoor-air-focused construction, renovation, and operation of buildings is made possible by transparent and verifiable criteria thanks to the Sentinel Holding concept.

Product:
EPDM-Dichtband Außen SK

SHI Product Passport no.:
13373-10-1028

WÜRTH

Legal notices

(*) These criteria apply to the construction project as a whole. While individual products can positively contribute to the overall building score through proper planning, the evaluation is always conducted at the building level. The information was provided entirely by the manufacturer.

Find our criteria here: https://www.sentinel-holding.eu/de/Themenwelten/Pr%C3%BCfkriterien%20f%C3%BCr%20Produkte

The SHI Database is the first and only database for construction products whose comprehensive processes and data accuracy are regularly verified by the independent auditing company SGS-TÜV Saar

SGS TÜV SAAR

Publisher

Sentinel Holding Institut GmbH
Bötzinger Str. 38
79111 Freiburg im Breisgau
Germany
Tel.: +49 761 590 481-70
info@sentinel-holding.eu
www.sentinel-holding.eu

EPDM-Dichtband mit Selbstklebestreifen für außen

61.7

Atmungsaktives, elastisches und witterungsbeständiges Dichtband mit einseitigem Selbstklebestreifen.



Wasserdicht und atmungsaktiv

- Dichtet zuverlässig gegen Wasser aus dem Außenbereich ab.
- Diffusionsoffene Membran, um Wasserdampf von innen nach außen diffundieren zu lassen und so feuchtigkeitsbedingte Bauschäden zu verhindern.

Sehr hohe Elastizität

- Optimale Sicherheit bei Bauteilbewegungen.
- Bequeme Verarbeitung durch Flexibilität.

Ausgezeichnete Witterungsbeständigkeit

- Hochwertiges Material sorgt für dauerhaft sichere Abdichtungen.
- Sehr gute UV-Beständigkeit.

Weitere Vorteile

- In Kombination mit EPDM-Dichtband-Kleber auch auf leicht unebenen Bauuntergründen geeignet.
- Gute Bitumenverträglichkeit.


Farbe	Schwarz
Klebstoffbasis	Acrylat
Ausführung	Mit Selbstklebestreifen
Chemische Basis	Ethylen-Propylen-Dien-Kautschuk
Dicke	0,6 mm
Rollenlänge	20 m
Temperaturbeständigkeit min./max.	-30 bis 75 °C
Baustoffklasse/Bedingung	B2 - Normal entflammbar/nach DIN 4102
UV-Beständigkeit	Ja

Breite	Art.-Nr.	VE
150 mm	**0875 350 151**	6
200 mm	**0875 350 201**	4
250 mm	**0875 350 251**	4
300 mm	**0875 350 301**	3
400 mm	**0875 350 401**	2
500 mm	**0875 350 501**	2

CL01_30040214O4, Rev: 0.332, Stand: 24. 03. 2026


Technische Informationen

Altbau brüstung innenanschlag gegen anschlag

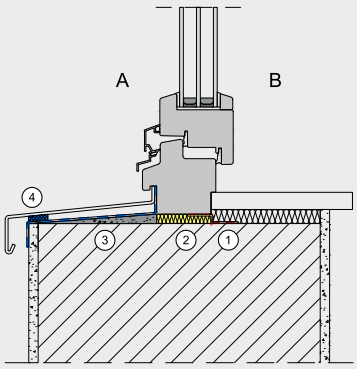

1. Fensterdichtband Universal Euraseal U-305, Fensterdichtband Universal Euraseal U-100, Fensterdichtband Innen Euraseal I-300, Fensterdichtband Universal Euraseal U-300
2. 1K-Pistolenschaum PURLOGIC Top, 1K-Pistolenschaum PURLOGIC Flex
3. EPDM-Dichtband Außen SK, EPDM-Dichtband Außen 0,8 mm Butyl, EPDM-Dichtband Außen
4. Dichtungsband VKP PLUS, Dichtungsband VKP MAX

Altbau brüstung mono mittig VKP

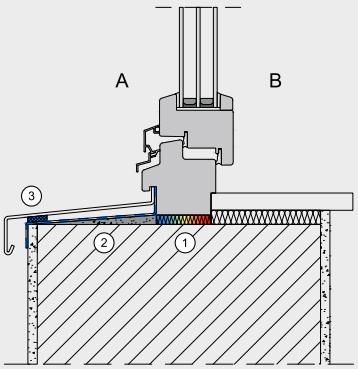

1. Dichtungsband VKP Trio 600 Standard, Dichtungsband VKP Trio, Dichtungsband VKP Trio SF, Dichtungsband VKP Trio 750 High Performance
2. EPDM-Dichtband Außen SK, EPDM-Dichtband Außen 0,8 mm Butyl, EPDM-Dichtband Außen
3. Dichtungsband VKP PLUS, Dichtungsband VKP MAX

Details/Anwendung

Für Fugen im Außenbereich, z. B. bei Fenstersimsen, bodentiefen Fenstern, Balkontüren, Außentürschwellen, Wintergärten und im Fassadenbereich.









CL01_3004021404, Rev: 0.332, Stand: 24. 03. 2026

Anleitung

- Untergründe müssen trocken, staub- und fettfrei sowie tragfähig sein.
- Für die Montage Dichtband auf gewünschte Länge schneiden, EPDM-Dichtband-Kleber auf dem Untergrund aufbringen und mit Spachtel abstreichen, Band auf den Untergrund kleben und mit Andrückwalze leicht andrücken.
- Auf spannungsfreien Einbau achten.
- Am Rahmen/Element dient der Selbstklebestreifen als Montagehilfe und es muss mit einer mechanischen Befestigung fixiert werden.

Hinweis

- Band ist nicht überputzbar.
- Nicht geeignet für Abdichtungen im erdberührten Bereich.
- Nicht geeignet für Abdichtungen nach DIN 18533.

Die Verarbeitungsangaben sind Empfehlungen, die auf unseren Versuchen und Erfahrungen beruhen; vor jedem Anwendungsfall sind Eigenversuche durchzuführen. Aufgrund der Vielzahl der Anwendungen sowie der Lagerungs- und Verarbeitungsbedingungen übernehmen wir keine Gewährleistung für ein bestimmtes Verarbeitungsergebnis. Soweit unser kostenloser Kundendienst technische Auskünfte gibt bzw. beratend tätig wird, erfolgt dies unter Ausschluss jeglicher Haftung, es sei denn, die Beratung bzw. Auskunft gehört zu unserem geschuldeten, vertraglich vereinbarten Leistungsumfang oder der Berater handelte vorsätzlich. Wir gewährleisten gleich bleibende Qualität unserer Produkte, technische Änderungen und Weiterentwicklungen behalten wir uns vor.

Ergänzende Produkte	Art.-Nr.
EPDM-Dichtband-Kleber Chemische Basis Hybrid-Polyurethan Gebinde Beutel Inhalt 600 ml	**0893 700 150**

CL01_30040214O4, Rev: 0.332, Stand: 24. 03. 2026