SENTINEL HOLDING
INSTITUT

SHI-PRODUKTPASS

Produkte finden - Gebäude zertifizieren

SHI-Produktpass-Nr.:

15171-10-1002

JACKODUR EVO

Warengruppe: Dämmstoffe - Dach & Fassade - Rohbau / Keller

JACKON Insulation GmbH
Ritzlebener Str. 1
39619 Arendsee OT Mechau

Produktqualitäten:

- SHI-Produkt bewertung 2024
- QNG Qualitätssiegel Nachhaltiges Gebäude
- DGNB NEUBAU 2023.2
- DGNB NEUBAU 2023
- DGNB NEUBAU 2018
- BNB-BN NEUBAU V2015
- EU-TAXONOMIE
- BREEAM DE NEUBAU 2018
- LEED v4.1 (outside US)

GEPRÜFT NACHHALTIGES PRODUKT
SHI PRODUKT PASS
SENTINEL HOLDING INSTITUT
www.sentinel-holding.eu/pruefkriterien

Köttner
Helmut Köttner
Wissenschaftlicher Leiter
Freiburg, den 26.08.2026

SENTINEL HOLDING
INSTITUT

Produkt:
JACKODUR EVO

SHI Produktpass-Nr.:
15171-10-1002

JACKON by BEWI

Inhalt

SHI-Produktbewertung 2024	1
QNG - Qualitätssiegel Nachhaltiges Gebäude	2
DGNB Neubau 2023.2	3
DGNB Neubau 2023	4
DGNB Neubau 2018	7
BNB-BN Neubau V2015	8
EU-Taxonomie	9
BREEAM DE Neubau 2018	10
LEED v4.1	11
Produktsiegel	12
Rechtliche Hinweise	13
Technisches Datenblatt/Anhänge	12

Wir sind stolz darauf, dass die SHI-Datenbank, die erste und einzige Datenbank für Bauprodukte ist, die ihre umfassenden Prozesse sowie die Aktualität regelmäßig von dem unabhängigen Prüfunternehmen SGS-TÜV Saar überprüfen lässt.

SGS

SGS TÜV SAAR

SENTINEL HOLDING
INSTITUT

Produkt:
JACKODUR EVO

SHI Produktpass-Nr.:
15171-10-1002

JACKON by BEWI

SHI-Produktbewertung 2024

Seit 2008 etabliert die Sentinel Holding Institut GmbH (SHI) einen einzigartigen Standard für schadstoffgeprüfte Produkte. Experten führen unabhängige Produktprüfungen nach klaren und transparenten Kriterien durch. Zusätzlich überprüft das unabhängige Prüfunternehmen SGS-TÜV Saar regelmäßig die Prozesse und Aktualität.

Kriterium	Produktkategorie	Schadstoffgrenzwert	Bewertung
SHI-Produktbewertung	Dämmstoffe	TVOC ≤ 300 µg/m³ Formaldehyd ≤ 24 µg/m³	Schadstoffgeprüft
Gültig bis: 05.06.2028			

SENTINEL HOLDING
INSTITUT

Produkt:
JACKODUR EVO

SHI Produktpass-Nr.:
15171-10-1002

JACKON by BEWI

QNG - Qualitätssiegel Nachhaltiges Gebäude

Das Qualitätssiegel Nachhaltiges Gebäude, entwickelt durch das Bundesministerium für Wohnen, Stadtentwicklung und Bauwesen (BMWSB), legt Anforderungen an die ökologische, soziokulturelle und ökonomische Qualität von Gebäuden fest. Das Sentinel Holding Institut prüft Bauprodukte gemäß den QNG-Anforderungen für eine Zertifizierung und vergibt das QNG-ready Siegel. Das Einhalten des QNG-Standards ist Voraussetzung für den KfW-Förderkredit. Für bestimmte Produktgruppen hat das QNG derzeit keine spezifischen Anforderungen definiert. Diese Produkte sind als nicht bewertungsrelevant eingestuft, können jedoch in QNG-Projekten genutzt werden.

Kriterium	Pos. / Bauproduktgruppe	Betrachtete Stoffe	QNG Freigabe
3.1.3 Schadstoffvermeidung in Baumaterialien	12.1 Kunstschaum-Dämmstoffplatten und Spritzschäume für Gebäude und Haustechnik	Halogenierte Treibmittel / SVHC: HBCD, TCEP / Emissionen	QNG-ready
Nachweis: Herstellererklärung 11.05.26			

SENTINEL HOLDING
INSTITUT

Produkt:
JACKODUR EVO

SHI Produktpass-Nr.:
15171-10-1002

JACKON by BEWI

DGNB Neubau 2023.2

Außenanwendung

Kriterium	Pos. / Relevante Bauteile / Bau-Materialien / Flächen	Betrachtete Stoffe / Aspekte	Qualitätsstufe
ENV 1.2 Risiken für die lokale Umwelt	40 Dämmplatten aus Kunststoffschäumen (innen und außen)	Gehalt an gefährlichen Stoffen: TCEP (SVHC), Halogenierte Treibmittel	Qualitätsstufe: 4
Nachweis: Herstellererklärung 11.05.26			

Innenanwendung

Kriterium	Pos. / Relevante Bauteile / Bau-Materialien / Flächen	Betrachtete Stoffe / Aspekte	Qualitätsstufe
ENV 1.2 Risiken für die lokale Umwelt			nicht bewertungsrelevant
Nachweis: Nur XPS-Dämmplatten an der Gebäudehülle außen sind bewertungsrelevant.			

SENTINEL HOLDING
INSTITUT

Produkt:
JACKODUR EVO

SHI Produktpass-Nr.:
15171-10-1002

JACKON by BEWI

DGNB Neubau 2023

Das DGNB-System (Deutsche Gesellschaft für Nachhaltiges Bauen) bewertet die Nachhaltigkeit von Gebäuden verschiedener Art. Das System ist sowohl anwendbar für private und gewerbliche Großprojekte als auch für kleinere Wohngebäude. Die Version 2023 setzt hohe Standards für ökologische, ökonomische, soziokulturelle und funktionale Aspekte während des gesamten Lebenszyklus eines Gebäudes.

Außenanwendung

Kriterium	Pos. / Relevante Bauteile / Bau-Materialien / Flächen	Betrachtete Stoffe / Aspekte	Qualitätsstufe
ENV 1.2 Risiken für die lokale Umwelt, 29.05.2025 (4. Auflage)	40 Kunststoffschaum-Dämmplatten für Gebäude (ohne Haustechnik)	Halogenierte Treibmittel / SVHC: HBCD, TCEP / Emissionen	Qualitätsstufe: 4
Nachweis: Herstellererklärung 11.05.26			

Kriterium	Pos. / Relevante Bauteile / Bau-Materialien / Flächen	Betrachtete Stoffe / Aspekte	Qualitätsstufe
ENV 1.2 Risiken für die lokale Umwelt, 03.05.2024 (3. Auflage)	40 Kunstschaum-Dämmstoffe für Gebäude und Haustechnik	Halogenierte Treibmittel	Qualitätsstufe: 4
Nachweis: Herstellererklärung 11.05.26			

Innenanwendung

Kriterium	Pos. / Relevante Bauteile / Bau-Materialien / Flächen	Betrachtete Stoffe / Aspekte	Qualitätsstufe
ENV 1.2 Risiken für die lokale Umwelt, 03.05.2024 (3. Auflage)	nicht zutreffend		nicht bewertungsrelevant
Nachweis: Nur XPS-Dämmplatten an der Gebäudehülle außen sind bewertungsrelevant.			

Kriterium	Pos. / Relevante Bauteile / Bau-Materialien / Flächen	Betrachtete Stoffe / Aspekte	Qualitätsstufe
ENV 1.2 Risiken für die lokale Umwelt, 29.05.2025 (4. Auflage)	nicht zutreffend		nicht bewertungsrelevant
Nachweis: Nur XPS-Dämmplatten an der Gebäudehülle außen sind bewertungsrelevant.			

Kriterium	Bewertung
ENV 1.1 Klimaschutz und Energie (*)	Kann Gesamtbewertung positiv beeinflussen
Nachweis: Es liegt eine EPD vor. - Eine effizientere Energienutzung im Gebäude wird durch den Wärmedämmstoff hervorgerufen. - Das Produkt besteht zu einem Teil aus recyceltem (CO2-reduzierten) PS	

Kriterium	Bewertung
ECO 1.1 Gebäudebezogene Kosten im Lebenszyklus (*)	Kann Gesamtbewertung positiv beeinflussen
Nachweis: Das Produkt trägt durch die Reduktion der Energiekosten zur Senkung der Lebenszykluskosten bei.	

Kriterium	Bewertung
ECO 2.6 Klimaresilienz (*)	Kann Gesamtbewertung positiv beeinflussen
Nachweis: Das Produkt ist ein Wärmedämmstoff und trägt damit zum Kühl- oder Hitzeschutz des Gebäude bei.	

Kriterium	Bewertung
SOC 1.1 Thermischer Komfort (*)	Kann Gesamtbewertung positiv beeinflussen
Nachweis: Das Produkt ist eine Wärmedämmstoff und kann damit die Innenraumtemperatur mit regulieren.	

Kriterium	Bewertung
SOC 1.2 Innenraumluftqualität (*)	Kann Gesamtbewertung positiv beeinflussen
Nachweis: Das Produkt entspricht dem AgBB Schema	

Kriterium	Bewertung
TEC 1.3 Qualität der Gebäudehülle (*)	Kann Gesamtbewertung positiv beeinflussen
Nachweis: Das Wärmedämmprodukt minimiert den Wärme-/Kältedurchgang an der Gebäudehülle.	

SENTINEL HOLDING
INSTITUT

Produkt:
JACKODUR EVO

SHI Produktpass-Nr.:
15171-10-1002

JACKON by BEWI

DGNB Neubau 2018

Das DGNB-System (Deutsche Gesellschaft für Nachhaltiges Bauen) bewertet die Nachhaltigkeit von Gebäuden verschiedener Art. Das System ist sowohl anwendbar für private und gewerbliche Großprojekte als auch für kleinere Wohngebäude.

Außenanwendung

Kriterium	Pos. / Relevante Bauteile / Bau-Materialien / Flächen	Betrachtete Stoffe / Aspekte	Qualitätsstufe
ENV 1.2 Risiken für die lokale Umwelt	40 KunstschaumDämmstoffe für Gebäude und Haustechnik	Halogenierte Treibmittel	Qualitätsstufe: 4
Nachweis: Herstellererklärung 11.05.26			

Innenanwendung

Kriterium	Pos. / Relevante Bauteile / Bau-Materialien / Flächen	Betrachtete Stoffe / Aspekte	Qualitätsstufe
ENV 1.2 Risiken für die lokale Umwelt	nicht zutreffend	nicht zutreffend	nicht bewertungsrelevant

SENTINEL HOLDING
INSTITUT

Produkt:
JACKODUR EVO

SHI Produktpass-Nr.:
15171-10-1002

JACKON by BEWI

BNB-BN Neubau V2015

Das Bewertungssystem Nachhaltiges Bauen ist ein Instrument zur Bewertung von Büro- und Verwaltungsgebäuden, Unterrichtsgebäuden, Laborgebäuden sowie Außenanlagen in Deutschland. Das BNB wurde vom damaligen Bundesministerium für Umwelt, Naturschutz, Bau und Reaktorsicherheit (BMUB) entwickelt und unterliegt heute dem Bundesministerium für Wohnen, Stadtentwicklung und Bauwesen.

Außenanwendung

Kriterium	Pos. / Bauprodukttyp	Betrachtete Schadstoffgruppe	Qualitätsniveau
1.1.6 Risiken für die lokale Umwelt	36a Mineralische und nicht mineralische Außenwanddämmungen (Außenwandfarben siehe Pos. 6, Putze siehe Pos. 35)	Biozide / gefährliche Stoffe / halogenierte Treibmittel	Qualitätsniveau 3
Nachweis: Herstellererklärung 11.05.26			

Innenanwendung

Kriterium	Pos. / Bauprodukttyp	Betrachtete Schadstoffgruppe	Qualitätsniveau
1.1.6 Risiken für die lokale Umwelt	36b mineralische und nicht mineralische Innendämmungen	VOC / Biozide / gefährliche Stoffe / gefährliche Einzelstoffe (Formaldehyd) halogenierte Treibmittel	Qualitätsniveau 4
Nachweis: Herstellererklärung 11.05.26, Prüfbericht-Nr.: DE224QSX 001			

SENTINEL HOLDING
INSTITUT

Produkt:
JACKODUR EVO

SHI Produktpass-Nr.:
15171-10-1002

JACKON by BEWI

EU-Taxonomie

Die EU-Taxonomie klassifiziert wirtschaftliche Aktivitäten und Produkte nach ihren Umweltauswirkungen. Auf der Produktebene gibt es gemäß der EU-Verordnung klare Anforderungen zu Formaldehyd und flüchtigen organischen Verbindungen (VOC). Die Sentinel Holding Institut GmbH kennzeichnet qualifizierte Produkte, die diesen Standard erfüllen.

Außenanwendung

Kriterium	Produkttyp	Betrachtete Stoffe	Bewertung
DNSH - Vermeidung und Verminderung der Umweltverschmutzung	Sonstige	Stoffe nach Anlage C	Erfüllt
Nachweis: Herstellererklärung 11.05.26			

Innenanwendung

Kriterium	Produkttyp	Betrachtete Stoffe	Bewertung
DNSH - Vermeidung und Verminderung der Umweltverschmutzung	Innendämmung	Stoffe nach Anlage C, Formaldehyd, Karzinogene VOC Kategorie 1A/1B	Erfüllt
Nachweis: Herstellererklärung 11.05.26, Prüfbericht-Nr.: DE224QSX 001			

SENTINEL HOLDING
INSTITUT

Produkt:
JACKODUR EVO

SHI Produktpass-Nr.:
15171-10-1002

JACKON by BEWI

BREEAM DE Neubau 2018

BREEAM (Building Research Establishment Environmental Assessment Methodology) ist ein britisches Gebäudebewertungssystem, welches die Nachhaltigkeit von Neubauten, Sanierungsprojekten und Umbauten einstuft. Das Bewertungssystem wurde vom Building Research Establishment (BRE) entwickelt und zielt darauf ab, ökologische, ökonomische und soziale Auswirkungen von Gebäuden zu bewerten und zu verbessern.

Außenanwendung

Kriterium	Produktkategorie	Betrachtete Stoffe	Qualitätsstufe
Hea 02 Qualität der Innenraumluft			nicht bewertungsrelevant

Innenanwendung

Kriterium	Produktkategorie	Betrachtete Stoffe	Qualitätsstufe
Hea 02 Qualität der Innenraumluft	Materialien für Decken, Wände, sowie Schall- und Wärmedämm-Materialien	Emissionen: Formaldehyd, TVOC, TSVOC, Krebserregende Stoffe	herausragende Qualität
Nachweis: Prüfbericht-Nr.: DE224QSX 001			

SENTINEL HOLDING
INSTITUT

Produkt:
JACKODUR EVO

SHI Produktpass-Nr.:
15171-10-1002

JACKON by BEWI

LEED v4.1

LEED (Leadership in Energy and Environmental Design) ist ein international anerkanntes Gebäudezertifizierungssystem des U.S. Green Building Council. Es zählt zu den weltweit am weitesten verbreiteten Nachhaltigkeitsstandards für Gebäude und wird insbesondere bei international ausgerichteten Projekten eingesetzt. LEED bewertet Gebäude ganzheitlich in Kategorien wie Energieeffizienz, Ressourcenschonung, Materialauswahl, Innenraumqualität und Standortqualität. Je nach erreichter Punktzahl werden die Zertifizierungsstufen LEED Certified, Silver, Gold oder Platinum vergeben.

Außenanwendung

Kriterium	Produktkategorie	Betrachtete Stoffe	Bewertung
EQ Credit: Low-Emitting Materials			nicht bewertungsrelevant

Innenanwendung

Kriterium	Produktkategorie	Betrachtete Stoffe	Bewertung
EQ Credit: Low-Emitting Materials	Dämmstoffe	Emissionen: Formaldehyd, VOC, Krebserregende Stoffe	Erfüllt
Nachweis: Prüfbericht-Nr.: DE224QSX 001			

SENTINEL HOLDING
INSTITUT

Produkt:
JACKODUR EVO

SHI Produktpass-Nr.:
15171-10-1002

JACKON by BEWI

Produktsiegel

In der Baubranche spielt die Auswahl qualitativ hochwertiger Materialien eine zentrale Rolle für die Gesundheit in Gebäuden und deren Nachhaltigkeit. Produktlabels und Zertifikate bieten Orientierung, um diesen Anforderungen gerecht zu werden. Allerdings besitzt jedes Zertifikat und Label eigene Prüfkriterien, die genau betrachtet werden sollten, um sicherzustellen, dass sie den spezifischen Bedürfnissen eines Bauvorhabens entsprechen.

Dieses Produkt ist schadstoffgeprüft und wird vom Sentinel Holding Institut empfohlen. Gesundes Bauen, Modernisieren und Betreiben von Immobilien erfolgt dank des Sentinel Holding Konzepts nach transparenten und nachvollziehbaren Kriterien.

Produkte mit dem QNG-ready Siegel des Sentinel Holding Instituts eignen sich für Projekte, für welche das Qualitätssiegel Nachhaltiges Gebäude (QNG) angestrebt wird. QNG-ready Produkte erfüllen die Anforderungen des QNG Anhangdokument 3.1.3 "Schadstoffvermeidung in Baumaterialien". Das KfW-Kreditprogramm Klimafreundlicher Neubau mit QNG kann eine höhere Fördersumme ermöglichen.

EPD-Global (Ehemals EPD-Norge) ist der norwegische Programmbetreiber für Environmental Product Declarations (EPDs). Das Programm richtet sich nach ISO 14025 und EN 15804 und stellt sicher, dass EPDs für Bau- und Industrieprodukte einheitlich, geprüft und vergleichbar veröffentlicht werden. Vor der Veröffentlichung wird jede EPD unabhängig verifiziert; EPD-Norge führt dafür klare Verfahren, Product Category Rules (PCR/NPCR) und ein öffentliches Register.

Produkt:
JACKODUR EVO

SHI Produktpass-Nr.:
15171-10-1002

Rechtliche Hinweise

(*) Die Kriterien dieses Steckbriefs beziehen sich auf das gesamte Bauobjekt. Die Bewertung erfolgt auf der Ebene des Gebäudes. Im Rahmen einer sachgemäßen Planung und fachgerechten Installation können einzelne Produkte einen positiven Beitrag zum Gesamtergebnis der Bewertung leisten. Das Sentinel Holding Institut stützt sich einzig auf die Angaben des Herstellers.

Alle Kriterien finden Sie unter:
https://www.sentinel-holding.eu/de/Themenwelten/Pr%C3%BCfkriterien%20f%C3%BCr%20Produkte

Wir sind stolz darauf, dass die SHI-Datenbank, die erste und einzige Datenbank für Bauprodukte ist, die ihre umfassenden Prozesse sowie die Aktualität regelmäßig von dem unabhängigen Prüfunternehmen SGS-TÜV Saar überprüfen lässt.

Herausgeber

Sentinel Holding Institut GmbH
Bötzinger Str. 38
79111 Freiburg im Breisgau
Tel.: +49 761 590 481-70
info@sentinel-holding.eu
www.sentinel-holding.eu

JACKODUR® EVO 300 Standard

λ_D = 0,032 W/(m·K) für alle Dämmstoffdicken
erfüllt alle Anforderungen nach DGNB, QNG und BNB



Die Evolution der Multilayerplatten.

JACKODUR® EVO ist die neue Generation an Wärmedämmung aus extrudiertem Polystyrolschaum (XPS). Die druckfesten Dämmplatten werden umweltfreundlich produziert und enthalten als Zellinhalt Luft. Die unerreichte Langlebigkeit und die extrem einfache Verarbeitung zeichnen die Wärmedämmung aus. Die Dämmplatten werden mit der Multilayertechnik produziert, so dass bei der Verarbeitung eine sichere und schnelle einlagige Verlegung bis 400 mm Dicke gewährleistet wird.

Vorteile:

- Nennwert 0,032 W/(m·K) in allen Dicken
- umweltfreundlich und ohne halogenierte Treibmittel produziert
- Dicken 40 bis 400 mm
- sichere und schnelle einlagige Verlegung



Besonders geeignet für:

- Perimeterdämmung unter Bodenplatte (DIN 4108-10 PB-dh)
- Kelleraußenwanddämmung
- Umkehrdach (bekiest, begrünt und mit Plattenbelägen)
- Kerndämmung
- Dämmung unter Estrich

www.jackon-insulation.com

JACKON by BEWI


Technische Daten JACKODUR® EVO

Eigenschaften	Angabe / Einheit	Norm	JACKODUR® EVO 300 Standard																			
Dicke	mm		40	50	60	80	100	120	140	160	180	200	220	240	260	280	300	320	340	360	380	400
Zellinhalt			Luft																			
Bemessungswert der Wärmeleitfähigkeit λ	W/(m·K)	DIN 4108-10	0,033																			
Nennwert der Wärmeleitfähigkeit λ_D	W/(m·K)	EN 13164	0,032																			
Wärmedurchlass-widerstand R_D	m²·K/W	EN 13164	1,25	1,55	1,95	2,50	3,10	3,75	4,35	5,00	5,60	6,25	6,85	7,50	8,10	8,75	9,35	10,00	10,60	11,25	11,85	12,50
Wasserdampfdiffusions-widerstandszahl μ		EN 12086	160	140	130	120	140	140	140	140	140	140	140	140	140	140	140	140	140	140	140	140
Wasseraufnahme durch Diffusion, WD(V)	Vol.-%	EN 12088	≤ 3																			
Druckspannung bei 10% Verformung oder Druckfestigkeit	kPa	EN 826	300																			
Dauerdruckfestigkeit, Kriechverhalten (50 Jahre, Stauchung < 2%)	kPa	EN 1606	-																			
Brandverhalten	Euro-klasse	EN 13501-1	E																			
Wasseraufnahme bei langzeitigem Eintauchen, WL(T)	Vol.-%	EN 12087	≤ 0,7																			
Widerstandsfähigkeit gegen Frost-Tau-Wechsel-beanspruchung, FTCD	Vol.-%	EN 12091	≤ 1																			
Dimensionsänderung bei 70°C. und 90% rel. Feuchte, DS(70/90)	%	EN 1604	≤ 5																			
Verformung bei 40 kPa Druck- und 70°C. Temperatur-beanspruchung, DLT(2)5	%	EN 1605	≤ 5																			
Anwendungsgrenz-temperatur	°C		-50 bis +75																			
Kapillarität			keine																			
Oberflächen beschaffenheit			glatt																			
Kantenausprägung			Stufenfalz																			

Wichtige Informationen für Ihre Planung finden Sie unter www.jackon-insulation.com

- Zulassungen, Prüfzeugnisse und Umweltproduktdeklaration (EPD)
- Verarbeitungshinweise
- Sicherheitsdatenblatt

JACKODUR® EVO bietet alle bewährten Eigenschaften einer XPS-Wärmedämmung: Das Material ist druckfest, maßstabil, feuchtigkeitsunempfindlich und verrottungsfest.

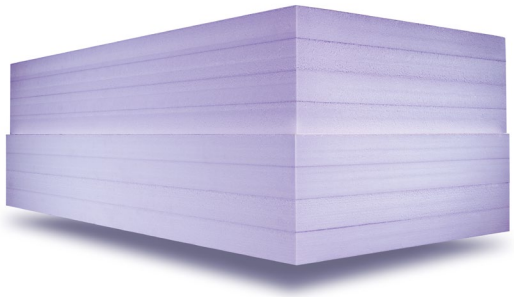

JACKODUR FREI HBCD FCKW HFCKW

Frei von HBCD Flammschutzmitteln sowie Flurchlorkohlen-wasserstoffe (FCKW), HFCKW- und HFKW-haltigen Treibmitteln.

JACKON Insulation GmbH
Carl-Benz-Straße 8
D-33803 Steinhagen

T +49 (0) 5204 9955 - 0
F +49 (0) 5204 9955 - 400

E info@jackodur.com
W www.jackon-insulation.com

JACKODUR® und JACKOBOARD® sind eingetragene Warenzeichen der JACKON Insulation GmbH. Irrtümer und Änderungen vorbehalten. Art.-Nr. 0000000 DE/AT/CH 03/2026

epd-global
Powered by EPD-Norway

Environmental product declaration

in accordance with ISO 14025 and EN 15804+A2

JACKODUR EVO



EPD-Global

Owner of the declaration:
BEWI ASA, Insulation and Construction

Product:
JACKODUR EVO

Declared unit:
1 m^3

This declaration is based on Product Category Rules:
CEN Standard EN 15804:2012+A2:2019 serves as core PCR.
NPCR 012:2022 Part B for Thermal insulation products

Program operator:
EPD-Global

Declaration number:
NEPD-15747-19713

Issue date:
29.05.2026

Valid to:
29.05.2031

EPD software:
LCAno EPD generator ID: 1542333

General information

Product

JACKODUR EVO

Owner of the declaration:

BEWI ASA, Insulation and Construction
Contact person: Marc Storm Andersen
Phone: +45 72157902
e-mail: marc.andersen@bewi.com

Program operator:

EPD-Global
Post Box 5250 Majorstuen, 0303 Oslo, Norway
Phone: +47 977 22 020
web: www.epd-global.com

Manufacturer:

BEWI Insulation Germany and Belgium
Europe

Declaration number:

NEPD-15747-19713

Place of production:

JACKON Insulation GmbH
Ritzlebener Str.1
39619 Arendsee, Germany

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A2:2019 serves as core PCR.
NPCR 012:2022 Part B for Thermal insulation products

Management system:

ISO 14001 og 9001 for all production sites

Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD-Global shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

Organisation no:

925437948

Declared unit:

1 m^3 JACKODUR EVO

Issue date:

29.05.2026

Declared unit with option:

A1, A2, A3, A4, A5, C1, C2, C3, C4, D

Valid to:

29.05.2031

Year of study:

2025

Functional unit:

1 m^2 of JACKODUR EVO with a thickness (32 mm) designed to provide a thermal resistance (R-value) = 1 m^2K/W within an expected service life for insulation materials. To convert the environmental indicators to the functional unit, the values in the tables on pages 7 to 10 must be multiplied by 0.032.

Comparability:

EPD of construction products may not be comparable if they not comply with EN 15804:2012+A2:2019 and seen in a building context.

General information on verification of EPD from EPD tools:

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Verification of each EPD is made according to EPD-Global's guidelines for verification and approval requiring that tools are i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPD-Global, and iii) the process is reviewed annually by an independent third party verifier. See Appendix G of EPD-Global's General Programme Instructions for further information on EPD tools

Development and verification of EPD:

The declaration is created using EPD tool lca.tools ver EPD2022.03, developed by LCA.no. The EPD tool is integrated in the company's management system, and has been approved by EPD-Global. NEPDT97

Developer of EPD: Mark Plate

Reviewer of company-specific input data and EPD: Martin Bendix

Verification of EPD tool:


Independent third party verification of the EPD tool, background data and test-EPD in accordance with EPD-Global's procedures and guidelines for verification and approval of EPD tools.

Third party verifier:

Elisabet Amat, GREENIZE projects

(no signature required)

Approved:



Håkon Hauan, CEO EPD-Global

Product

Product description:

Product description
JACKODUR EVO is an extruded polystyrene foam (XPS) produced according to EN 13164 and available in board shape with a density range from 28 to 33 kg/m3, 31,3 kg/m3 in average (measured). It has specifically low values of thermal conductivity. The boards can be delivered in compressive strength 300 kPa. To meet the need of various applications the boards are produced with different surfaces: with the extrusion skin, planed, grooved or with thermal embossing. JACKODUR EVO boards are supplied with different edge treatments such as butt edge, ship-lap and tongue and groove. The EPD is related to an unlaminated product only; lamination and additional product treatment are not considered. For the placing on the market of the product in the European Union/European Free Trade Association (EU/EFTA) (with the exception of Switzerland) Regulation (EU) No. 305/2011 (CPR) applies. The product needs a declaration of performance taking into consideration EN 13164 Building insulation and the CE-marking.

Product application
The variety of the performance properties of JACKODUR EVO make it suitable for use in a large number of applications such as: perimeter insulation, inverted roof insulation, insulation of pitched roofs, floor insulation including insulation of highly loaded industrial floors, insulation of thermal bridges for exterior walls, External Thermal Insulation Composite Systems (ETICS), insulation of cavity walls, agricultural building ceiling insulation, prefabricated elements e.g. building sandwich panels, insulation for building equipment and industrial installations (pipe sections, ...)

Product specification

Materials	kg	%
Expansion gas	2.14	6.42
Filler	0.134	0.4016
Flame retardant	0.333	0.9979
Fuels, fossil	0.577	1.73
Plastic - Polystyrene (PS)	21.24	63.65
Plastic - Recycled	8.94	26.80
Total	33.37	100.00

Packaging	kg	%
Packaging - Plastic	0.402	100.00
Total incl. packaging	33.77	100.00

Technical data:

Further technical information can be obtained on www.jackon-insulation.com and in the table below

Name	Value	Unit	Norm
Gross density	28 - 33	kg / m3	EN 1602
Compressive strength	0.3	N/mm2	EN 826
Tensile strength	0,1 - 0,4	N/mm2	EN 1607
Reaction to fire	E	class	EN 13501-1
Dimensional stability at 70°C and 90% relative humidity	< 5	%	EN 1605
Deformation under 40 kPa load and 70°C	< 5	%	EN 1605
Compressive creep (50 years, deformation < 2%)	130	sc kPa 3	EN 1606
Long term water absorption by total immersion	0,7	Level i %	EN 12087
Long term water absorption by diffusion	WD(V) 3	class	EN 12088
Freeze-thaw resistance	FTCD1	class	EN 12091
Water vapour diffusion resistance factor	250-80		EN 12086

Market:

Europe

Reference service life, product

A reference service life (RSL) according to ISO 15686 cannot be declared. The durability of JACKODUR EVO is normally at least as long as the lifetime of the building in which it is used
(more than 80 years).

Reference service life, building or construction works

As in the construction where it is used

LCA: Calculation rules

Declared unit:

1 m^3 JACKODUR EVO

Cut-off criteria:

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included. These cut-off criteria do not apply for hazardous materials and substances.

< 0,5%

Allocation:

The allocation is made in accordance with the provisions of EN 15804+A2. Incoming energy and water and waste production in-house is allocated equally among all products through mass allocation. Effects of primary production of recycled materials is allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.

Data quality:


Specific data for the product composition are provided by the manufacturer. The data represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on EPDs according to EN 15804 and different LCA databases. The data quality of the raw materials in A1 is presented in the table below.
The two data sets on expansion gas belong to two different blowing agents.

Materials	Source	Data quality	Year
Expansion gas	ecoinvent 3.6	Database	2019
Expansion gas	ecoinvent 3.6	Database	2020
Filler	ecoinvent 3.6	Database	2019
Flame retardant	Ecoinvent 3.6	Database	2019
Fuels, fossil	ecoinvent 3.6	Database	2019
Packaging - Plastic	ecoinvent 3.6	Database	2019
Plastic - Polystyrene (PS)	Plastics Europe + ecoinvent 3.6	European average.	2020
Plastic - Recycled	Supplier	EPD	0

System boundaries (X=included, MND=module not declared, MNR=module not relevant)

Product stage			Construction installation stage		Use stage							End of life stage				Beyond the system boundaries
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	MND	MND	MND	MND	MND	MND	MND	X	X	X	X	X

System boundary:

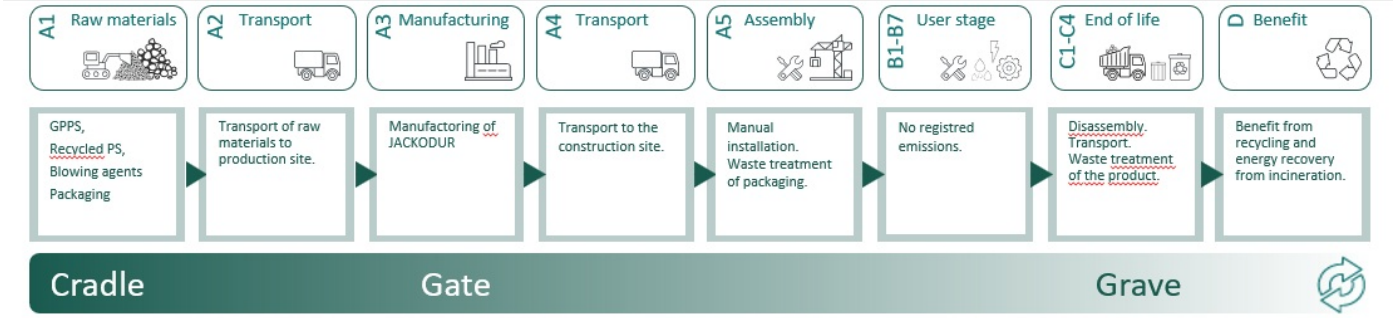

Additional technical information:

The following information describe the scenarios in the different modules of the EPD.

Product & Construction installation stages (A1-A5)
- The product stage includes the acquisition of all raw materials, products and energy, transport to the production site, packaging, and waste processing up to the 'end-of-waste" state or final disposal.
- No solid waste is generated from the production of XPS products, as the cut off is immediately returned to production line (however, some solid waste is produced from the raw material packaging, e.g., PE-folio).
- The blowing agent content in the XPS products is highest right after production, after which it continues to decrease. The release of blowing agent is reported in module A3 since it relates to the production
- A2-A4 is based on a weighted average for BEWI Insulation Germany and Belgium production sites (JACKON Insulation GmbH in Mechau – Germany and JACKON Insulation nv in Olen - Belgium).
- For A4, a weighted average distance is calculated based on the distance from both production sites.

End of Life stage (C1-C4) includes:
- The XPS product is dismantled manually, thus, no environmental impacts are associated with module C1. The dismantled XPS product is transported 50 km to an incineration plant by a EURO 6 diesel truck.
- Incineration of the dismantled XPS is included in module C3. Energy credits related to energy recovery from the incineration is included in module D.

Re-use, recovery, and recycling potential (D) includes:
- Credits for energy recovery related to the incineration is included in module D.
- The packaging materials, LDPE foil reach the end-of-waste stage in module A5, and the benefits from recycling and incineration of the packaging materials are included in module D

LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

Transport from production place to user (A4)	Capacity utilisation (incl. return) %	Distance (km)	Fuel/Energy Consumption	Unit	Value (Liter/tonne)
Truck, 16-32 tonnes, EURO 6 (kgkm)	36.7 %	1040.00	0.043	l/tkm	44.72

Assembly (A5)	Unit	Value			
Waste, packaging, plastic to average treatment - A5 (inkl transport) (kg)	kg	0.402			

De-construction demolition (C1)	Unit	Value			
Waste treatment, PS, Insulation, Germany (kg)	kg	31.30			

Transport to waste processing (C2)	Capacity utilisation (incl. return) %	Distance (km)	Fuel/Energy Consumption	Unit	Value (Liter/tonne)
Truck, over 32 tonnes, EURO 6 (kgkm)	53.3 %	50.00	0.023	l/tkm	1.15

Waste processing (C3)	Unit	Value			
Waste, Polystyrene, incineration	kg	28.17			
Recycling of PS	kg	3.13			

Disposal (C4)	Unit	Value			
Landfilling of ashes from incineration of PS	kg	0.08451			
Waste, inert waste, to landfill (kg)	kg	0.00			

Benefits and loads beyond the system boundaries (D)	Unit	Value			
substitution of electricity (MJ)	MJ	16.34			
Substitution of thermal energy (MJ)	MJ	899.51			
Substitution of expandable polystyrene, EPS, granulate (kg)	kg	3.13			

LCA: Results

The LCA results are presented below for the declared unit defined on page 2 of the EPD document.

Environmental impact												
	Indicator	**Unit**	A1	A2	A3	A4	A5	C1	C2	C3	C4	D
	GWP-total	kg CO_2 -eq	5.69E+01	2.54E+00	7.73E+00	2.22E+00	3.18E-02	0.00E+00	1.36E-01	8.98E+01	4.38E-03	-1.69E+01
	GWP-fossil	kg CO_2 -eq	5.67E+01	2.54E+00	7.67E+00	2.22E+00	3.18E-02	0.00E+00	1.36E-01	8.98E+01	4.38E-03	-1.66E+01
	GWP-biogenic	kg CO_2 -eq	1.87E-01	1.05E-03	4.21E-02	9.18E-04	4.39E-06	0.00E+00	5.84E-05	6.19E-04	2.32E-06	-8.02E-02
	GWP-luluc	kg CO_2 -eq	1.37E-02	9.03E-04	1.50E-02	7.89E-04	2.44E-06	0.00E+00	4.15E-05	9.81E-05	6.71E-07	-1.79E-01
	ODP	kg CFC11 -eq	1.34E-06	5.75E-07	1.31E-06	5.02E-07	1.91E-09	0.00E+00	3.29E-08	6.44E-08	4.70E-10	-3.80E-01
	AP	mol H+ -eq	1.32E-01	7.29E-03	1.65E-02	6.37E-03	3.93E-05	0.00E+00	4.39E-04	1.07E-02	1.54E-05	-8.10E-02
	EP-FreshWater	kg P -eq	7.61E-04	2.03E-05	1.75E-04	1.77E-05	6.55E-08	0.00E+00	1.08E-06	6.36E-06	5.91E-08	-6.48E-04
	EP-Marine	kg N -eq	3.21E-02	1.44E-03	3.38E-03	1.26E-03	3.59E-05	0.00E+00	9.61E-05	5.14E-03	4.81E-06	-1.99E-02
	EP-Terrestial	mol N -eq	3.49E-01	1.61E-02	4.10E-02	1.41E-02	1.41E-04	0.00E+00	1.07E-03	5.50E-02	5.47E-05	-2.14E-01
	POCP	kg NMVOC -eq	1.29E-01	6.18E-03	2.60E-01	5.40E-03	4.63E-05	0.00E+00	4.21E-04	1.32E-02	1.51E-05	-7.61E-02
	ADP-minerals&metals[1]	kg Sb-eq	1.52E-04	7.01E-05	8.92E-05	6.12E-05	1.69E-07	0.00E+00	2.43E-06	2.77E-06	2.45E-08	-3.30E-05
	ADP-fossil[1]	MJ	1.84E+03	3.84E+01	2.49E+02	3.35E+01	1.31E-01	0.00E+00	2.21E+00	5.50E+00	3.98E-02	-3.30E+02
	WDP[1]	m^3	4.95E+02	3.71E+01	7.15E+02	3.24E+01	4.64E-01	0.00E+00	1.70E+00	1.22E+01	4.12E-01	-2.67E+02

GWP-total = Global Warming Potential total; GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment: EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption

"Reading example: 9.0 E-03 = 9.0*10-3 = 0.009"

1. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator

Remarks to environmental impacts

Additional environmental impact indicators

Indicator		Unit	A1	A2	A3	A4	A5	C1	C2	C3	C4	D
	PM	Disease incidence	8.64E-07	1.55E-07	8.65E-08	1.36E-07	7.06E-10	0.00E+00	1.25E-08	4.50E-08	1.91E-10	-2.96E-06
	IRP[2]	kgBq U235 -eq	1.61E+00	1.68E-01	2.81E+00	1.47E-01	5.93E-04	0.00E+00	9.68E-03	9.20E-03	1.89E-04	-4.08E-01
	ETP-fw[1]	CTUe	8.60E+03	2.84E+01	1.15E+02	2.48E+01	1.25E-01	0.00E+00	1.62E+00	1.33E+01	7.32E-02	-4.34E+02
	HTP-c[1]	CTUh	2.11E-08	0.00E+00	3.13E-09	0.00E+00	3.00E-12	0.00E+00	0.00E+00	3.78E-09	4.00E-12	-8.94E-09
	HTP-nc[1]	CTUh	8.86E-07	3.11E-08	8.35E-08	2.71E-08	1.18E-10	0.00E+00	1.57E-09	1.49E-07	1.35E-10	-3.92E-07
	SQP[1]	dimensionless	8.93E+01	2.68E+01	6.84E+01	2.34E+01	2.29E-01	0.00E+00	2.54E+00	6.55E-01	1.10E-01	-4.97E+02

PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Potential Soil Quality Index (dimensionless)

"Reading example: 9.0 E-03 = 9.0*10-3 = 0.009"

1. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator
2. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

Resource use												
Indicator		Unit	A1	A2	A3	A4	A5	C1	C2	C3	C4	D
	PERE	MJ	1.48E+01	5.49E-01	4.55E+01	4.80E-01	3.32E-03	0.00E+00	2.79E-02	1.58E-01	2.32E-03	-4.12E+02
	PERM	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	PERT	MJ	1.48E+01	5.49E-01	4.55E+01	4.80E-01	3.32E-03	0.00E+00	2.79E-02	1.58E-01	2.32E-03	-4.12E+02
	PENRE	MJ	1.10E+03	3.84E+01	2.49E+02	3.35E+01	1.31E-01	0.00E+00	2.21E+00	5.50E+00	3.98E-02	-3.30E+02
	PENRM	MJ	8.50E+02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	PENRT	MJ	1.95E+03	3.84E+01	2.49E+02	3.35E+01	1.31E-01	0.00E+00	2.21E+00	5.50E+00	3.98E-02	-3.30E+02
	SM	kg	8.94E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	RSF	MJ	4.93E-01	1.96E-02	8.44E-01	1.72E-02	8.70E-05	0.00E+00	9.74E-04	4.42E-03	5.77E-05	-4.15E-02
	NRSF	MJ	3.12E-01	7.02E-02	6.05E+00	6.14E-02	2.28E-04	0.00E+00	3.27E-03	0.00E+00	9.18E-03	-2.72E+01
	FW	m^3	1.25E+00	4.10E-03	8.40E-02	3.58E-03	6.94E-05	0.00E+00	2.52E-04	1.56E-02	3.66E-05	-3.85E-01

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary materials; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Net use of fresh water

"Reading example: 9.0 E-03 = 9.0*10-3 = 0.009"

End of life - Waste

Indicator		Unit	A1	A2	A3	A4	A5	C1	C2	C3	C4	D
	HWD	kg	9.10E-02	1.98E-03	4.45E-02	1.73E-03	0.00E+00	0.00E+00	1.21E-04	0.00E+00	7.26E-02	-5.66E-03
	NHWD	kg	4.31E+00	1.87E+00	6.20E-01	1.63E+00	4.02E-01	0.00E+00	1.92E-01	0.00E+00	3.60E-02	-1.59E+00
	RWD	kg	6.27E-04	2.61E-04	2.39E-03	2.28E-04	0.00E+00	0.00E+00	1.51E-05	0.00E+00	2.40E-07	-3.57E-04

HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed

"Reading example: 9.0 E-03 = 9.0*10-3 = 0.009"

End of life - Output flow

Indicator		Unit	A1	A2	A3	A4	A5	C1	C2	C3	C4	D
	CRU	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	MFR	kg	9.51E-01	0.00E+00	0.00E+00	0.00E+00	2.05E-01	0.00E+00	0.00E+00	3.13E+00	0.00E+00	0.00E+00
	MER	kg	2.11E-01	0.00E+00	1.48E-01	0.00E+00	2.01E-05	0.00E+00	0.00E+00	2.82E+01	0.00E+00	0.00E+00
	EEE	MJ	3.25E-01	0.00E+00	8.80E-02	0.00E+00	3.09E-05	0.00E+00	0.00E+00	4.96E+01	0.00E+00	0.00E+00
	EET	MJ	4.91E+00	0.00E+00	1.33E+00	0.00E+00	4.67E-04	0.00E+00	0.00E+00	7.51E+02	0.00E+00	0.00E+00

CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported energy electrical; EET = Exported energy thermal

"Reading example: 9.0 E-03 = 9.0*10-3 = 0.009"

Biogenic Carbon Content

Indicator	Unit	At the factory gate
Biogenic carbon content in product	kg C	0.00E+00
Biogenic carbon content in accompanying packaging	kg C	0.00E+00

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO2

Additional requirements

Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

Electricity mix	Source	Amount	Unit
Electricity, belgium (kWh)	ecoinvent 3.6	248.03	g CO2-eq/kWh
Electricity, with Guarantee of origin, 01.01.2025 - 31.12.2025 - BEWI Arendsee, Germany (kWh)	ecoinvent 3.6	29.24	g CO2-eq/kWh

Dangerous substances

The product contains no substances given by the REACH Candidate list.

Indoor environment

JACKODUR EVO can be used indoor however they are generally not exposed to the indoor air but covered by a finishing element or system.
The VOC emission testing meets the requirements of the AgBB/DIBt method.
The tested products all comply with the requirements of DIBt and AgBB for the use in the indoor environment.
The tested products also all achieved the A+ rating of the French VOC labelling scheme.

Additional Environmental Information

Additional environmental impact indicators required in NPCR Part A for construction products											
Indicator	**Unit**	A1	A2	A3	A4	A5	C1	C2	C3	C4	D
GWPIOBC	kg CO_2 -eq	5.70E+01	2.54E+00	7.73E+00	2.22E+00	3.18E-02	0.00E+00	1.36E-01	8.98E+01	4.54E-03	-1.68E+01

GWP-IOBC: Global warming potential calculated according to the principle of instantaneous oxidation. In order to increase the transparency of biogenic carbon contribution to climate impact, the indicator GWP-IOBC is required as it declares climate impacts calculated according to the principle of instantaneous oxidation. GWP-IOBC is also referred to as GWP-GHG in context to Swedish public procurement legislation.

Bibliography

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures.
ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.
EN 15804:2012+A2:2019 Environmental product declaration - Core rules for the product category of construction products.
ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products.
ecoinvent v3, Allocation, cut-off by classification, Swiss Centre of Life Cycle Inventories.
Iversen et al., (2021) eEPD v2021.09 Background information for EPD generator tool system verification, LCA.no Report number: 07.21
Vold et. al., (2022) EPD generator for NPCR 012 Thermal insulation, Background information for EPD generator application and LCA data, LCA.no report number: 07.22.
NPCR Part A: Construction products and services. Ver. 2.0. April 2021, EPD-Norge.
NPCR 012 Part B for Part B for Thermal insulation products, Ver. 2.0, 31.03.2022, EPD Norway.

epd-global Powered by EPD-Norway	**Program operator and publisher** EPD-Global Postboks 5250 Majorstuen, 0303 Oslo, Norway	Phone: e-mail: web:	+47 977 22 020 post@epd-norge.no www.epd-global.com
BEWI	**Owner of the declaration:** BEWI ASA, Insulation and Construction Hammarvikringen 64, HAMAR 7263, Norway	Phone: e-mail: web:	+45 72157902 marc.andersen@bewi.com https://bewi.com
LCA.no	**Author of the Life Cycle Assessment** LCA.no AS Dokka 6A, 1671 Kråkerøy, Norway	Phone: e-mail: web:	+47 916 50 916 post@lca.no www.lca.no
LCA.no	**Developer of EPD generator** LCA.no AS Dokka 6A, 1671 Kråkerøy, Norway	Phone: e-mail: web:	+47 916 50 916 post@lca.no www.lca.no
ECO PLATFORM EPD VERIFIED	ECO Platform ECO Portal	web: web:	www.eco-platform.org ECO Portal

JACKON Insulation GmbH | Ritzlebener Straße 1 | D-39619 Arendsee

Herstellererklärung für das Produkt JACKODUR EVO

Hiermit bestätigen wir, dass bei den extrudierten Polystyrolhartschaumprodukten JACKODUR EVO keine Stoffe enthalten sind, die

- SVHC entsprechend Verordnung (EG) 1907/2006 (REACH)
- HBCD
- halogenierte Treibmittel wie (H)F(C)KW
- CMR-Stoffe der Kategorie 1A/1B entsprechend CLP-Verordnung 1272/2008

sind.

Arendsee, 11.05.2026

Daniel Geigenfeind
Geschäftsführer

i.V. Dr. Mark Plate
Sustainability and Product Stewardship

JACKON Insulation GmbH
Ritzlebener Straße 1
D-39619 Arendsee (Mechau)
T +49 (0)39036 960-0
F +49 (0)39036 960-290

Commerzbank AG
IBAN DE25 2584 1403 0701 0010 00
BIC COBADEFFXXX
T info@jackodur.com
W www.jackon-insulation.com

Geschäftsführer: Daniel Geigenfeind
Registergericht Stendal / HRB 3496
Steuer-Nr. 106/107/03629
USt.-ID-Nr. DE126959786

Reg.-Nr. 67674