SENTINEL HOLDING
INSTITUT

SHI PRODUCT PASSPORT

Find products. Certify buildings.

SHI Product Passport No.:

15206-10-1023

Luzi Sprint Anschlussstreifen

Product group: Sealants - Sealing tapes - Waterproofing membranes

KNAUF

Knauf Gips KG
Am Bahnhof 7
97346 Iphofen

Product qualities:

- SHI Product Assessment 2024
- QNG Qualitätssiegel Nachhaltiges Gebäude
- DGNB NEW CONSTRUCTION 2023
- DGNB NEW CONSTRUCTION 2018
- BNB-BN NEUBAU V2015
- EU taxonomy
- BREEAM DE NEUBAU 2018
- LEED v4.1 (outside US)

CERTIFIED SUSTAINABLE PRODUCT
SHI PRODUCT PASSPORT
SENTINEL HOLDING INSTITUT
www.sentinel-holding.eu

Köttner

Helmut Köttner
Scientific Director
Freiburg, 08 April 2026

SENTINEL HOLDING
INSTITUT

Product:
Luzi Sprint Anschlussstreifen

SHI Product Passport no.:
15206-10-1023

KNAUF

Contents

SHI Product Assessment 2024	1
QNG - Qualitätssiegel Nachhaltiges Gebäude	2
DGNB New Construction 2023	3
DGNB New Construction 2018	4
BNB-BN Neubau V2015	5
EU taxonomy	6
BREEAM DE Neubau 2018	7
LEED v4.1	8
Product labels	9
Legal notices	10
Technical data sheet/attachments	11

The SHI Database is the first and only database for construction products whose comprehensive processes and data accuracy are regularly verified by the independent auditing company SGS-TÜV Saar

SGS TÜV SAAR

SENTINEL HOLDING
INSTITUT

Product:
Luzi Sprint Anschlussstreifen

SHI Product Passport no.:
15206-10-1023

KNAUF

SHI Product Assessment 2024

Since 2008, Sentinel Holding Institut GmbH (SHI) has been establishing a unique standard for products that support healthy indoor air. Experts carry out independent product assessments based on clear and transparent criteria. In addition, the independent testing company SGS regularly audits the processes and data accuracy.

Criteria	Product category	Harmful substance limit	Assessment
SHI Product Assessment	Other products	TVOC ≤ 300 µg/m^3 Formaldehyd ≤ 24 µg/m^3	Indoor Air Quality Certified
Valid untill: 08 March 2029			

SENTINEL HOLDING
INSTITUT

Product:
Luzi Sprint Anschlussstreifen

SHI Product Passport no.:
15206-10-1023

KNAUF

QNG - Qualitätssiegel Nachhaltiges Gebäude

The Qualitätssiegel Nachhaltiges Gebäude (Quality Seal for Sustainable Buildings), developed by the German Federal Ministry for Housing, Urban Development and Building (BMWSB), defines requirements for the ecological, socio-cultural, and economic quality of buildings. The Sentinel Holding Institut evaluates construction products in accordance with QNG requirements for certification and awards the QNG ready label. Compliance with the QNG standard is a prerequisite for eligibility for the KfW funding programme. For certain product groups, the QNG currently has no specific requirements defined. Although classified as not assessment-relevant, these products remain suitable for QNG-certified projects.

Criteria	Pos. / product group	Considered substances	QNG assessment
3.1.3 Schadstoffvermeidung in Baumaterialien			QNG ready - Not relevant for assessment

SENTINEL HOLDING
INSTITUT

Product:
Luzi Sprint Anschlussstreifen

SHI Product Passport no.:
15206-10-1023

KNAUF

DGNB New Construction 2023

The DGNB System (German Sustainable Building Council) assesses the sustainability of various types of buildings. It can be applied to both large-scale private and commercial projects as well as smaller residential buildings. The 2023 version sets high standards for ecological, economic, socio-cultural, and functional aspects throughout the entire life cycle of a building.

Criteria	No. / Relevant building components / construction materials / surfaces	Considered substances / aspects	Quality level
ENV 1.2 Local environmental impact, 03.05.2024 (3rd edition)	not applicable		Not relevant for assessment

Criteria	Assessment
SOC1.2 Indoor air quality (*)	May positively contribute to the overall building score

Criteria	No. / Relevant building components / construction materials / surfaces	Considered substances / aspects	Quality level
ENV 1.2 Local environmental impact, 29.05.2025 (4th edition)	not applicable		Not relevant for assessment

SENTINEL HOLDING
INSTITUT

Product:
Luzi Sprint Anschlussstreifen

SHI Product Passport no.:
15206-10-1023

KNAUF

DGNB New Construction 2018

The DGNB System (German Sustainable Building Council) assesses the sustainability of various types of buildings. It can be applied to both large-scale private and commercial projects as well as smaller residential buildings.

Criteria	No. / Relevant building components / construction materials / surfaces	Considered substances / aspects	Quality level
ENV 1.2 Local environmental impact	not applicable	not applicable	Not relevant for assessment

SENTINEL HOLDING
INSTITUT

Product:
Luzi Sprint Anschlussstreifen

SHI Product Passport no.:
15206-10-1023

KNAUF

BNB-BN Neubau V2015

The Bewertungssystem Nachhaltiges Bauen (Assessment System for Sustainable Building) is a tool for evaluating public office and administrative buildings, educational facilities, laboratory buildings, and outdoor areas in Germany. The BNB was developed by the former Federal Ministry for the Environment, Nature Conservation, Building and Nuclear Safety (BMUB) and is now overseen by the Federal Ministry for Housing, Urban Development and Building (BMWSB).

Criteria	Pos. / product type	Considered substance group	Quality level
1.1.6 Risiken für die lokale Umwelt			Not relevant for assessment

SENTINEL HOLDING
INSTITUT

Product:
Luzi Sprint Anschlussstreifen

SHI Product Passport no.:
15206-10-1023

KNAUF

EU taxonomy

The EU Taxonomy classifies economic activities and products according to their environmental impact. At the product level, the EU regulation defines clear requirements for harmful substances, formaldehyde and volatile organic compounds (VOCs). The Sentinel Holding Institut GmbH labels qualified products that meet this standard.

Criteria	Product type	Considered substances	Assessment
DNSH - Pollution prevention and control		Substances according to Annex C	EU taxonomy compliant
Verification: EMICODE EC1+-Zertifikat vom 08.03.2024			

SENTINEL HOLDING
INSTITUT

Product:
Luzi Sprint Anschlussstreifen

SHI Product Passport no.:
15206-10-1023

KNAUF

BREEAM DE Neubau 2018

BREEAM (Building Research Establishment Environmental Assessment Methodology) is a UK-based building assessment system that evaluates the sustainability of new constructions, refurbishments, and conversions. Developed by the Building Research Establishment (BRE), the system aims to assess and improve the environmental, economic, and social performance of buildings.

Criteria	Product category	Considered substances	Quality level
Hea 02 Indoor Air Quality			Not relevant for assessment

SENTINEL HOLDING
INSTITUT

Product:
Luzi Sprint Anschlussstreifen

SHI Product Passport no.:
15206-10-1023

KNAUF

LEED v4.1

LEED (Leadership in Energy and Environmental Design) is an internationally recognised building certification system developed by the U.S. Green Building Council. It is one of the most widely used sustainability standards for buildings worldwide and is particularly applied in internationally oriented projects. LEED assesses buildings holistically across categories such as energy efficiency, resource conservation, material selection, indoor environmental quality and site sustainability. Depending on the number of points achieved, projects are awarded one of the certification levels: LEED Certified, Silver, Gold or Platinum.

Criteria	Product category	Assessment
EQ Credit: Low-Emitting Materials		Not relevant for assessment

SENTINEL HOLDING
INSTITUT

Product:
Luzi Sprint Anschlussstreifen

SHI Product Passport no.:
15206-10-1023

KNAUF

Product labels

In the construction industry, high-quality materials are crucial for a building's indoor air quality and sustainability. Product labels and certificates offer guidance to meet these requirements. However, the evaluation criteria of these labels vary, and it is important to carefully assess them to ensure products align with the specific needs of a construction project.

The EMICODE® label, awarded by the German manufacturers' association "GEV – Gemeinschaft Emissionskontrollierte Verlegewerkstoffe, Klebstoffe und Bauprodukte e. V.", is primarily relevant for flooring installation materials. The EMICODE® EC 1 PLUS label, as the premium class, sets significantly stricter emission limits than the other label variants.

This product is SHI Indoor Air Quality certified and recommended by Sentinel Holding Institut. Indoor-air-focused construction, renovation, and operation of buildings is made possible by transparent and verifiable criteria thanks to the Sentinel Holding concept.

Products bearing the Sentinel Holding Institute QNG-ready seal are suitable for projects aiming to achieve the "Qualitätssiegel Nachhaltiges Gebäude" (Quality Seal for Sustainable Buildings). QNG-ready products meet the requirements of QNG Appendix Document 3.1.3, "Avoidance of Harmful Substances in Building Materials." The KfW loan program Climate-Friendly New Construction with QNG may allow for additional funding.

Product:
Luzi Sprint Anschlussstreifen

SHI Product Passport no.:
15206-10-1023

KNAUF

Legal notices

(*) These criteria apply to the construction project as a whole. While individual products can positively contribute to the overall building score through proper planning, the evaluation is always conducted at the building level. The information was provided entirely by the manufacturer.

Find our criteria here: https://www.sentinel-holding.eu/de/Themenwelten/Pr%C3%BCfkriterien%20f%C3%BCr%20Produkte


The SHI Database is the first and only database for construction products whose comprehensive processes and data accuracy are regularly verified by the independent auditing company SGS-TÜV Saar

SGS

SGS TÜV SAAR

Publisher


Sentinel Holding Institut GmbH
Bötzinger Str. 38
79111 Freiburg im Breisgau
Germany
Tel.: +49 761 590 481-70
info@sentinel-holding.eu
www.sentinel-holding.eu

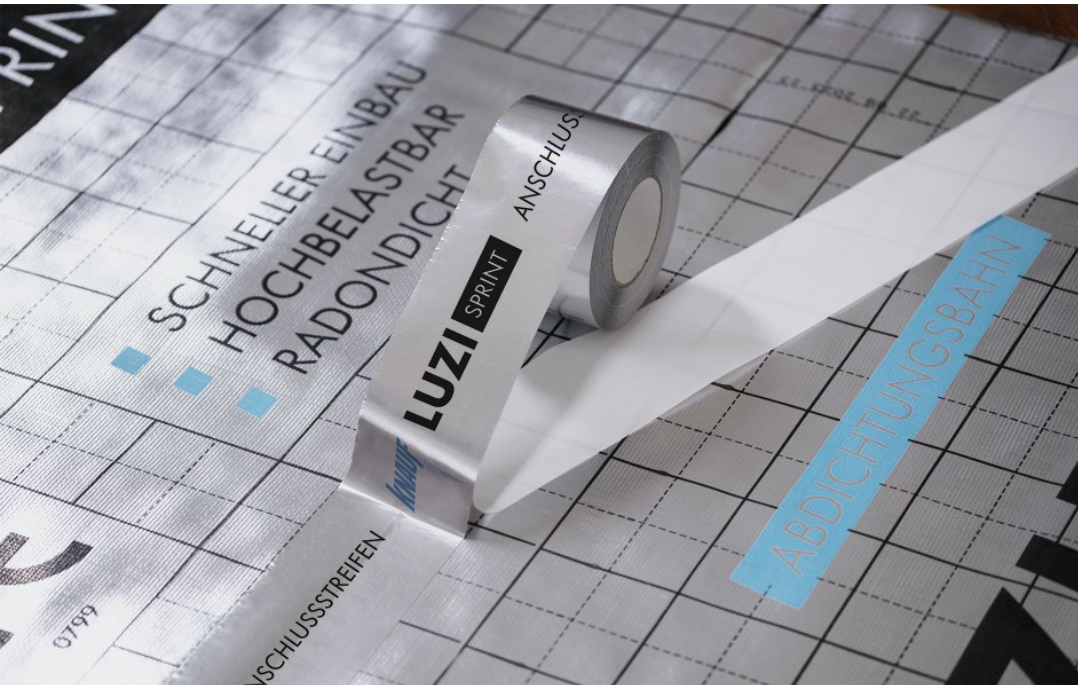

Boden-Systeme

F4502_DSP.de

Produkt-Datenblatt 07/2024



LUZI SPRINT Anschlussstreifen

Selbstklebender Anschlussstreifen für LUZI SPRINT Abdichtungsbahn

Produktbeschreibung

LUZI SPRINT Anschlussstreifen ist ein vollflächig selbstklebender, alukaschierter Klebestreifen mit 50 m Länge und 0,10 m Breite.

Lagerung

Rollen stehend lagern und vor direkter Sonneneinstrahlung und hohen Temperaturen schützen.
Lagerzeit: 24 Monate

Qualität

Das Produkt unterliegt der ständigen werkseigenen Produktionskontrolle.

Eigenschaften und Mehrwert

- Schnell und einfach zu verlegen
- Gut anpassungsfähig an Untergrund
- Hohe Klebekraft
- Sichere, einfache Ausbildung von Details
- Keine Quellschweißmittel erforderlich
- Keine offene Flamme erforderlich
- Bitumenverträglich
- Für innen

GEV-EMICODE EC 1 PLUS sehr emissionsarm

Selbstklebender Anschlussstreifen für LUZI SPRINT Abdichtungsbahn

Anwendungsbereich

Abdichten der Kopfstöße der LUZI SPRINT Abdichtungsbahn sowie Anschlüsse der LUZI SPRINT Abdichtungsbahn an aufgehenden Bauteilen und Mauersperrbahn.

Ausführung

Hinweis	Weitere Informationen, siehe Produktdatenblätter: LUZI SPRINT Abdichtungsbahn F4501_DSP.de Katja Sprint Anschlussfix F458.de

Untergrund / Vorbehandlung

Die zu verbindenden Teile müssen sauber sein.

Verarbeitung

Verklebung von Kopfstößen bei LUZI SPRINT Abdichtungsbahn

Die Verklebung erfolgt durch Abziehen der Schutzfolie und Andrücken auf dem Stoß.

Anschlüsse an Mauersperrbahn

Verkleben der LUZI SPRINT Abdichtungsbahn mit der sauberen Mauersperrbahn mit LUZI SPRINT Anschlussstreifen.

Verarbeitungstemperatur / -klima

Die Verarbeitungstemperatur sollte -5 °C nicht unterschreiten.

Selbstklebender Anschlussstreifen für LUZI SPRINT Abdichtungsbahn

Technische Daten

Bezeichnung	Norm	Einheit	LUZI SPRINT Anschlussstreifen
Gewicht	**–**	**kg**	**ca. 1,85**

Materialbedarf/Verbrauch

Bezeichnung	Verbrauch m/m Anschlusslänge	Ergiebigkeit m/Rolle
LUZI SPRINT Anschlussstreifen	1	50

Lieferprogramm

Bezeichnung	Ausführung	Länge	Breite	Verpackungseinheit	Artikelnummer	EAN
LUZI SPRINT Anschlusstreifen	50 m	50 m	0,10 m	1 Rolle/Karton	00832349	4003982576057

Nachhaltigkeit und Umwelt

Kurzbeschreibung	Einheit	Wert
Anforderungen des AgBB-Schemas	–	Erfüllt
Entspricht der französischen Emissionsklasse	–	A+
Zertifikate	–	Emicode EC 1^{PLUS}

Selbstklebender Anschlussstreifen für LUZI SPRINT Abdichtungsbahn

Sicherheitsdatenblatt beachten!
Sicherheitsdatenblätter siehe
pd.knauf.de

Videos für Knauf Systeme und Produkte sind unter folgendem Link zu finden:
youtube.com/knauf

Ausschreibungstexte für alle Knauf Systeme und Produkte mit Exportfunktionen für Word, PDF und GAEB
ausschreibungscenter.de

Mit der Tablet App Knauf Infothek stehen jetzt alle Informationen und Dokumente der Knauf Gips KG jederzeit und an jedem Ort immer aktuell, übersichtlich und bequem zur Verfügung.
knauf.de/Infothek

Knauf Direkt
Technischer Auskunft-Service:
Tel.: 09323 916 3000 *
knauf-direkt@knauf.com

www.knauf.com

Knauf Gips KG Am Bahnhof 7, 97346 Iphofen

* Unser Technischer Auskunft-Service steht nur für gewerbliche Anliegen zur Verfügung. Sie können sich mit ihren Firmendaten hierfür registrieren. Nähere Informationen finden Sie hier: www.knauf.de/tas

Technische Änderungen vorbehalten. Es gilt die jeweils aktuelle Auflage. Die enthaltenen Angaben entsprechen unserem derzeitigen Stand der Technik. Die allgemein anerkannten Regeln der Bautechnik, einschlägige Normen, Richtlinien und handwerklichen Regeln müssen vom Ausführenden neben den Verarbeitungsvorschriften beachtet werden. Unsere Gewährleistung bezieht sich nur auf die einwandfreie Beschaffenheit unseres Materials. Verbrauchs-, Mengen- und Ausführungsangaben sind Erfahrungswerte, die im Falle abweichender Gegebenheiten nicht ohne weiteres übertragen werden können. Alle Rechte vorbehalten. Änderungen, Nachdruck und fotomechanische sowie elektronische Wiedergabe, auch auszugsweise, bedürfen unserer ausdrücklichen Genehmigung.

Konstruktive, statische und bauphysikalische Eigenschaften von Knauf Systemen können nur gewährleistet werden, wenn ausschließlich Knauf Systemkomponenten oder von Knauf empfohlene Produkte verwendet werden.

Gemeinschaft Emissionskontrollierte Verlegewerkstoffe, Klebstoffe und Bauprodukte e.V.

GEV EMICODE®

Lizenzerteilung zur Führung des EMICODE

Lizenzierungs-Nummer:	18372/22.02.15
Für den Artikel	LUZI Sprint Anschlussstreifen
der Firma	Knauf Gips KG
wird auf Antrag vom	07.03.2024

unter Bezugnahme auf die Einstufung gemäß den nach § 10 der GEV-Zeichensatzung festgelegten Richtlinien

namens der Gemeinschaft Emissionskontrollierte Verlegewerkstoffe, Klebstoffe und Bauprodukte e.V. für den oben genannten Artikel nach § 5 Abs. 4 der GEV-Zeichensatzung die Lizenz zur Führung des GEV-Zeichens

GEV-EMICODE® EC 1 PLUS sehr emissionsarm

erteilt. Damit erfüllt dieser Artikel die rückseitig aufgeführten Kriterien.
Die Firma ist ordentliches Mitglied der GEV.

OM116 08.03.2024
gültig bis 08.03.2029

Der Geschäftsführer
Gemeinschaft Emissionskontrollierte Verlegewerkstoffe,
Klebstoffe und Bauprodukte e.V.
Völklinger Straße 4 · D-40219 Düsseldorf

Hinweise zu den Voraussetzungen über die Vergabe der Lizenz für den EMICODE

Das gemäß vorseitiger Lizenz eingestufte Produkt hat nach der Satzung und den Richtlinien des Technischen Beirats der GEV u.a. den folgenden Kriterien zu genügen:

- Das Produkt entspricht allen gesetzlichen Bestimmungen, insbesondere denen des Chemikalienrechtes und seiner Verordnungen.
- Das Produkt ist nach der Definition der TRGS 610 lösemittelfrei, sofern es sich nicht um ein Oberflächenprodukt handelt. Soweit es einer Produktgruppe nach GISCODE zuzuordnen ist, wird diese angegeben.
- Für das Produkt wird ein Sicherheitsdatenblatt nach lokalem Recht in der jeweils aktuellen Fassung erstellt.
- Krebserregende, erbgutverändernde oder fruchtschädigende Stoffe der Klassen 1A und 1B werden dem Produkt bei der Herstellung nicht zugesetzt.
- Die Prüfung des Produktes erfolgt nach der definierten „GEV-Prüfmethode“. Die VOC-Bestimmung wird dabei in einer Prüfkammer nach dem Tenax-Thermodesorptions-Verfahren mit nachgeschalteter GC/MS-Analyse durchgeführt.
- Die Einstufung in EMICODE-Klassen erfolgt entsprechend den nachstehenden Bezeichnungen und TVOC/TSVOC-Konzentrationsbereichen. Zur Produktkennzeichnung ist die zutreffende EMICODE-Klasse zu verwenden:

1) Verlegewerkstoffe, Klebstoffe und Bauprodukte

Parameter	EC 1 PLUS	EC 1	EC 2
	max. zulässige Konzentration [µg/m³]		
TVOC nach 3 Tagen	≤ 750	≤ 1000	≤ 3000
TVOC nach 28 Tagen	≤ 60	≤ 100	≤ 300
TSVOC nach 28 Tagen	≤ 40	≤ 50	≤ 100
R-Wert basierend auf AgBB-NIK-Werten nach 28 Tagen	1	-	-
Summe der nicht bewertbaren VOC	≤ 40	-	-
Formaldehyd nach 3 Tagen	≤ 50	≤ 50	≤ 50
Acetaldehyd nach 3 Tagen	≤ 50	≤ 50	≤ 50
Summe von Form- und Acetaldehyd	≤ 0,05 ppm	≤ 0,05 ppm	≤ 0,05 ppm
Summe von flüchtigen K1A/K1B Stoffen nach 3 Tagen	≤ 10	≤ 10	≤ 10
Jeder flüchtige K1A/K1B Stoff nach 28 Tagen	≤ 1	≤ 1	≤ 1

2) Oberflächenbehandlungsmittel für Parkett, mineralische Böden und elastische Bodenbeläge

Parameter	EC 1 PLUS	EC 1	EC 2
	max. zulässige Konzentration [µg/m³]		
Summe TVOC + TSVOC nach 28 Tagen	≤ 100 davon max. 40 SVOC	≤ 150 davon max. 50 SVOC	≤ 450 davon max. 100 SVOC
Formaldehyd nach 3 Tagen	≤ 50	≤ 50	≤ 50
Acetaldehyd nach 3 Tagen	≤ 50	≤ 50	≤ 50
Jeder flüchtige K1A/K1B Stoff nach 3 Tagen	≤ 10	≤ 10	≤ 10
Jeder flüchtige K1A/K1B Stoff nach 28 Tagen	≤ 1	≤ 1	≤ 1