SENTINEL HOLDING
INSTITUT

SHI PRODUCT PASSPORT

Find products. Certify buildings.

SHI Product Passport No.:

1219-10-1047

MeisterDesign. pro DD 250

Product group: Interior construction - Floor coverings / Wall coverings

MEISTER

MeisterWerke Schulte GmbH
Johannes-Schulte-Allee 5
59602 Rüthen-Meiste

Product qualities:

- SHI Product Assessment 2024 ✓
- QNG Qualitätssiegel Nachhaltiges Gebäude ✓
- DGNB NEW CONSTRUCTION 2023.2 ✓
- DGNB NEW CONSTRUCTION 2023 ✓
- DGNB NEW CONSTRUCTION 2018 ✓
- BNB-BN NEUBAU V2015 ✓
- EU TAXONOMY ✓
- BREEAM DE NEUBAU 2018 ✓

CERTIFIED SUSTAINABLE PRODUCT
SHI PRODUCT PASSPORT
SENTINEL HOLDING INSTITUT
www.sentinel-holding.eu

Köttner

Helmut Köttner
Scientific Director
Freiburg, 17 August 2026

Product:
MeisterDesign. pro DD 250

SHI Product Passport no.:
1219-10-1047

MEISTER

Contents

SHI Product Assessment 2024	1
QNG - Qualitätssiegel Nachhaltiges Gebäude	2
DGNB New Construction 2023.2	3
DGNB New Construction 2023	4
DGNB New Construction 2018	5
BNB-BN Neubau V2015	6
EU taxonomy	7
BREEAM DE Neubau 2018	8
Product labels	9
Legal notices	10
Technical data sheet/attachments	11

The SHI Database is the first and only database for construction products whose comprehensive processes and data accuracy are regularly verified by the independent auditing company SGS-TÜV Saar

SENTINEL HOLDING
INSTITUT

Product:
MeisterDesign. pro DD 250

SHI Product Passport no.:
1219-10-1047

MEISTER

SHI Product Assessment 2024

Since 2008, Sentinel Holding Institut GmbH (SHI) has been establishing a unique standard for products that support healthy indoor air. Experts carry out independent product assessments based on clear and transparent criteria. In addition, the independent testing company SGS regularly audits the processes and data accuracy.

Criteria	Product category	Harmful substance limit	Assessment
SHI Product Assessment	Other floor coverings	TVOC ≤ 160 µg/m^3 Formaldehyd ≤ 10 µg/m^3	Indoor Air Quality Certified
Valid untill: 28 July 2027			

SENTINEL HOLDING
INSTITUT

Product:
MeisterDesign. pro DD 250

SHI Product Passport no.:
1219-10-1047

MEISTER

QNG - Qualitätssiegel Nachhaltiges Gebäude

The Qualitätssiegel Nachhaltiges Gebäude (Quality Seal for Sustainable Buildings), developed by the German Federal Ministry for Housing, Urban Development and Building (BMWSB), defines requirements for the ecological, socio-cultural, and economic quality of buildings. The Sentinel Holding Institut evaluates construction products in accordance with QNG requirements for certification and awards the QNG ready label. Compliance with the QNG standard is a prerequisite for eligibility for the KfW funding programme. For certain product groups, the QNG currently has no specific requirements defined. Although classified as not assessment-relevant, these products remain suitable for QNG-certified projects.

Criteria	Pos. / product group	Considered substances	QNG assessment
3.1.3 Schadstoffvermeidung in Baumaterialien	2.2 Resilient floor coverings – including multilayer systems	VOC / Emissions / hazardous substances / polycyclic aromatic hydrocarbons (PAH) / SVHC / heavy metals	QNG ready
Verification: Herstellererklärung Inhaltsstoffe vom 13.10.2025, Blauer Engel 06.01.26			

Product:
MeisterDesign. pro DD 250

SHI Product Passport no.:
1219-10-1047

MEISTER

DGNB New Construction 2023.2

Criteria	No. / Relevant building components / construction materials / surfaces	Considered substances / aspects	Quality level
ENV 1.2 Local environmental impact			Not relevant for assessment

SENTINEL HOLDING
INSTITUT

Product:
MeisterDesign. pro DD 250

SHI Product Passport no.:
1219-10-1047

MEISTER

DGNB New Construction 2023

The DGNB System (German Sustainable Building Council) assesses the sustainability of various types of buildings. It can be applied to both large-scale private and commercial projects as well as smaller residential buildings. The 2023 version sets high standards for ecological, economic, socio-cultural, and functional aspects throughout the entire life cycle of a building.

Criteria	No. / Relevant building components / construction materials / surfaces	Considered substances / aspects	Quality level
ENV 1.2 Local environmental impact, 03.05.2024 (3rd edition)	7 Floor coverings (Resilient floor coverings)	VVOCs, VOC, SVOC emissions and content of hazardous substances	Quality level 4
Verification: Blauer Engel DE-UZ 120 06.01.26			

Criteria	No. / Relevant building components / construction materials / surfaces	Considered substances / aspects	Quality level
ENV 1.2 Local environmental impact, 29.05.2025 (4th edition)	7 Floor coverings for indoor use (elastic floor coverings)	VVOCs, VOC, SVOC emissions and content of hazardous substances	Quality level 4
Verification: Blauer Engel DE-UZ 120 06.01.26			

SENTINEL HOLDING
INSTITUT

Product:
MeisterDesign. pro DD 250

SHI Product Passport no.:
1219-10-1047

MEISTER

DGNB New Construction 2018

The DGNB System (German Sustainable Building Council) assesses the sustainability of various types of buildings. It can be applied to both large-scale private and commercial projects as well as smaller residential buildings.

Criteria	No. / Relevant building components / construction materials / surfaces	Considered substances / aspects	Quality level
ENV 1.2 Local environmental impact	7 Floor coverings (Resilient floor coverings)	VOC / SVOC / hazardous substances	Quality level 4
Verification: Herstellererklärung Inhaltsstoffe vom 13.10.2025, Blauer Engel DE-UZ 120 06.01.26			

SENTINEL HOLDING
INSTITUT

Product:
MeisterDesign. pro DD 250

SHI Product Passport no.:
1219-10-1047

MEISTER

BNB-BN Neubau V2015

The Bewertungssystem Nachhaltiges Bauen (Assessment System for Sustainable Building) is a tool for evaluating public office and administrative buildings, educational facilities, laboratory buildings, and outdoor areas in Germany. The BNB was developed by the former Federal Ministry for the Environment, Nature Conservation, Building and Nuclear Safety (BMUB) and is now overseen by the Federal Ministry for Housing, Urban Development and Building (BMWSB).

Criteria	Pos. / product type	Considered substance group	Quality level
1.1.6 Risiken für die lokale Umwelt	2a Elastic floor coverings – with and without bonded underlay or insulation layer	VOC / hazardous substances / heavy metals	Quality level 5
Verification: Blauer Engel DE-UZ 120 06.01.26, Technisches Datenblatt 06/26			

SENTINEL HOLDING
INSTITUT

Product:
MeisterDesign. pro DD 250

SHI Product Passport no.:
1219-10-1047

MEISTER

EU taxonomy

The EU Taxonomy classifies economic activities and products according to their environmental impact. At the product level, the EU regulation defines clear requirements for harmful substances, formaldehyde and volatile organic compounds (VOCs). The Sentinel Holding Institut GmbH labels qualified products that meet this standard.

Criteria	Product type	Considered substances	Assessment
DNSH - Pollution prevention and control	Floor coverings (including associated adhesives and sealants)	Stoffe nach Anlage C, Formaldehyd, Karzinogene VOC Kategorie 1A/1B	compliant
Verification: Blauer Engel DE-UZ 120 06.01.26, Herstellererklärung Inhaltsstoffe vom 13.10.2025			

SENTINEL HOLDING
INSTITUT

Product:
MeisterDesign. pro DD 250

SHI Product Passport no.:
1219-10-1047

MEISTER

BREEAM DE Neubau 2018

BREEAM (Building Research Establishment Environmental Assessment Methodology) is a UK-based building assessment system that evaluates the sustainability of new constructions, refurbishments, and conversions. Developed by the Building Research Establishment (BRE), the system aims to assess and improve the environmental, economic, and social performance of buildings.

Criteria	Product category	Considered substances	Quality level
Hea 02 Indoor Air Quality	Flooring materials (including floor levelling compounds and resin flooring)	Emissions: Formaldehyde, TVOC, TSVOC, carcinogens	Normal quality
Verification: Blauer Engel DE-UZ 120 06.01.26			

Product:
MeisterDesign. pro DD 250

SHI Product Passport no.:
1219-10-1047

MEISTER

Product labels

In the construction industry, high-quality materials are crucial for a building's indoor air quality and sustainability. Product labels and certificates offer guidance to meet these requirements. However, the evaluation criteria of these labels vary, and it is important to carefully assess them to ensure products align with the specific needs of a construction project.

The privately owned eco-INSTITUT certifies low-emission, low-odour and low-pollutant construction and cleaning products, furnishings and furniture on the basis of its strict test criteria and precisely documented certification conditions.

Products bearing the Sentinel Holding Institute QNG-ready seal are suitable for projects aiming to achieve the "Qualitätssiegel Nachhaltiges Gebäude" (Quality Seal for Sustainable Buildings). QNG-ready products meet the requirements of QNG Appendix Document 3.1.3, “Avoidance of Harmful Substances in Building Materials.” The KfW loan program Climate-Friendly New Construction with QNG may allow for additional funding.

The *Blue Angel* (“Blauer Engel”) ecolabel, awarded by the German Federal Environment Agency, is one of the oldest and most widely used ecolabels in Germany. It exists in several variants for many different product groups. Since the test criteria, such as threshold values, differ between these variants, it is important to consider each one individually when assessing indoor air quality.

Product:
MeisterDesign. pro DD 250

SHI Product Passport no.:
1219-10-1047

MEISTER

Legal notices

(*) These criteria apply to the construction project as a whole. While individual products can positively contribute to the overall building score through proper planning, the evaluation is always conducted at the building level. The information was provided entirely by the manufacturer.

Find our criteria here: https://www.sentinel-holding.eu/de/Themenwelten/Pr%C3%BCfkriterien%20f%C3%BCr%20Produkte

The SHI Database is the first and only database for construction products whose comprehensive processes and data accuracy are regularly verified by the independent auditing company SGS-TÜV Saar

SGS TÜV SAAR

Publisher

Sentinel Holding Institut GmbH
Bötzinger Str. 38
79111 Freiburg im Breisgau
Germany
Tel.: +49 761 590 481-70
info@sentinel-holding.eu
www.sentinel-holding.eu

MEISTERWERKE

Herstellererklärung Inhaltsstoffe

Hiermit bestätigen wir:

MeisterWerke Schulte GmbH

Johannes-Schulte-Allee 5

59602 Rüthen - Meiste

für das folgende Produkt / die folgenden Produkte

MeisterDesign. pro DD 250

Das Produkt/ Erzeugnis/ mindestens ein Teilerzeugnis enthält Stoffe der Kandidatenliste (Version zum Ausstellungsdatum) oberhalb 0,1 Massen%	**nein**
CMR-Stoffe der Kategorie 1A/1B < 0,1%	**ja**
Reproduktionstoxische Phthalate < 0,1 %	**ja**
keine Zinn-, Cadmium- und Bleistabilisatoren	**ja**
Chlorparaffine (SCCPs + MCCPs + LCCPs) < 0,10 %	**ja**
Einhaltung AgBB-Schema	**ja**

MeisterWerke

MeisterWerke Schulte GmbH
Johannes-Schulte-Allee 5
59602 Rüthen-Meiste

Rüthen-Meiste, 13.10.2025 i.A. J. Kordt

Ort, Datum, Unterschrift, Stempel

Ihr Ansprechpartner für Rückfragen:

Name: Janina Kordt Telefon: 02952 / 816-168


Mailadresse: janina.kordt@meisterwerke.com

MEISTER

Produktdaten

Designboden MeisterDesign. pro

DD 250

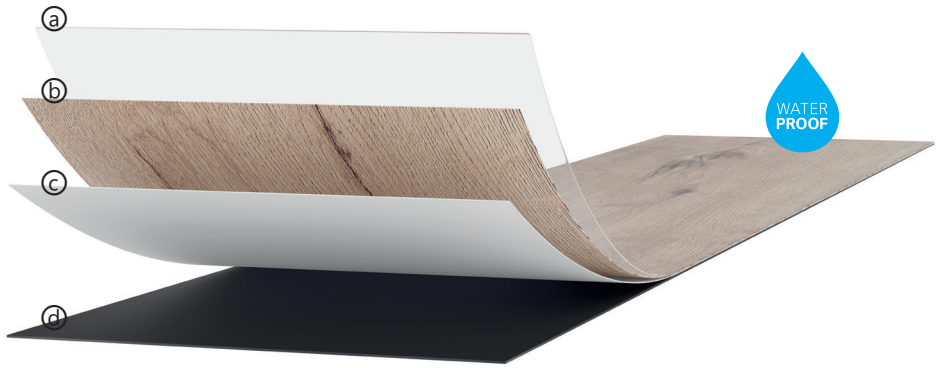

	Prüfungen	DIN/EN Norm	Designboden **Meister**Design. pro DD 250
Allgemeine Daten zum Produktaufbau			
	Art des Belags:		Elastisches Fußbodenpaneel auf Basis thermoplastischer Polymere mit einer abriebbeständigen, dekorativen Decklage
	Gesamtstärke:		ca. 2,5 mm
	Deckmaß: (Länge × Breite)		1290 × 253 mm
	Produktaufbau:		a. Mehrschichtige P-Tec-Strong-Oberfläche mit elastischer PP-Spezialfolie (Polypropylen) und ultramatter Excimer-Lackierung (PVC-frei) b. Dekorschicht c. Grundschicht d. MC-Trägerschicht – auf Basis natürlicher Bestandteile (Kreide) und PostConsumer-Recycling im Polymeranteil (Polypropylen)
Technische Daten			
	Beanspruchungsklasse:	ISO 10874	23 / 33 / 42
ANTI-BACTERIAL SURFACE	Antibakterielle Oberflächeneigenschaft:	ISO 22196	Effektivität der antibakteriellen Eigenschaft gegenüber Staphylococcus aureus ATCC 6538P „signifikant“, Wert der antibakteriellen Wirkung 2 ≤ A < 3. Effektivität der antibakteriellen Eigenschaft gegenüber Escherichia coli ATCC 8739 „stark“, Wert der antibakteriellen Wirkung A ≥ 3.
	Fleckenunempfindlichkeit:	EN 438-2	Gruppe 1: Grad 5 Gruppe 2: Grad 5 Gruppe 3: Grad 4 Farbige Gummi-, Kautschuk- oder Kunststoff-Gleiter und –Rollen sowie dunkle Auto-, Fahrrad- oder Gerätereifen können möglicherweise Verfärbungen verursachen. Nach Möglichkeit helle migrationsfreie Möbelgleiter, Rollen oder Reifen verwenden.
	Lichtechtheit:	EN ISO 105-B02	≥ Stufe 6 nach Wollblauskala / ≥ Stufe 4 nach Grauskala
B_{fl}-s1	Brandverhalten:	EN 13501	B_{fl}-s1 (schwer entflammbar)
DS	Gleitverhalten:	EN 14041 / 13 893	DS
E1 HCHO	Emission von Formaldehyd:	EN 717-1	E1 / REACH konform
DL PCP	Gehalt an Pentachlorphenol:	EN 14041 / 14823	< 5 ppm
	Eindruck nach konstanter Belastung:	EN ISO 24 343-1	≤ 0,1 mm

Technische Daten			
	Stuhlrollenbeständigkeit:	EN ISO 4918	Typ W. 25.000 Zyklen. Keine störenden Veränderungen an der Oberflächenschicht, nur Glanzänderungen
	Verhalten bei der Simulation des Verschiebens eines Möbelfußes:	EN ISO 16581	keine sichtbaren Veränderungen bei Typ 2 (100 kg)
	Maßänderung aufgrund von Temperaturveränderung:	ISO 19322 (Verfahren B)	≤ 0,25 %
	Fußbodenheizung:		Geeignet für Warmwasser-Fußbodenheizung. Eine elektrisch betriebene Fußbodenheizung ist grundsätzlich geeignet, wenn diese im Estrich oder der Betonschicht eingebaut ist und somit nicht als Folienheizung auf der Betonschicht liegt. Die Heizschlangen / Rohre / Drähte müssen auf der gesamten Fläche ausliegen und nicht partiell vorhanden sein. Werden die Flächen nur partiell beheizt, so ist der Bodenbelag mit Bewegungsfugen (systemgebundenen Schienen) zu versehen. Die maximale Oberflächentemperatur von 29° C darf nicht überschritten werden. Handelsübliche Folienheizungen können pauschal nicht freigegeben werden. Eine Ausnahme besteht bei selbstregulierenden Heizungssystemen unter Einhaltung der Oberflächentemperatur von 29° C.
	Fußbodenkühlung:		Zur Verlegung auf gekühlten Fußbodenkonstruktionen steht ein separates Merkblatt zur Verfügung.
	Wärmedurchlasswiderstand:	EN 12667	≤ 0,013 (m²K)/W
	Wärmeleitfähigkeit:	EN 12667	≥ 0,075 W/(m*K)
	Rutschhemmung:	DIN EN 16165 (Anhang B)	R 10
Toleranzen			
	Rechtwinkligkeit der Elemente:	ISO 19322	Sollwerte erfüllt
	Bestimmung der Kantengeradheit:	ISO 19322	Sollwerte erfüllt
Allgemeine Daten zur Umwelt, Verlegung und Pflege			
	Entsorgung:		Reststücke / Großmengen entsprechend kommunaler Bestimmungen entsorgen (z. B. Abgabe bei Wertstoffhöfen).
	Reinigung und Pflege:		Bauschlussreinigung: Dr. Schutz PU Reiniger Laufende Reinigung: Dr. Schutz PU Reiniger Auffrischungspflege: Dr. Schutz Vollpflege matt
	Anwendungsbereiche:		Der Boden ist ideal geeignet für alle Wohnbereiche, für gewerbliche Bereiche mit starker Beanspruchung wie z. B. Großraumbüros, öffentliche Gebäude sowie für den leichtindustriellen Bereich mit normaler Beanspruchung wie z.B. Lagerhallen usw. Zur Verlegung in Feuchträumen (z. B. Badezimmer) geeignet. Dieser Boden ist nicht geeignet zur Verlegung im Außenbereich, sowie Duschen, öffentlichen Waschräumen und Saunen. Für Behandlungsräume und Arztpraxen gelten gesonderte Anforderungen.
	Voraussetzung für die Verlegung:	DIN 18365	Die Verlegeuntergründe müssen entsprechend den allgemein anerkannten Regeln des Fachs unter Beachtung der VOB, Teil C DIN 18 365 „Bodenbelagarbeiten“ als verlegereif gelten. Der Verlegeuntergrund muss trocken (bei mineralischen Untergründen max. 2 % bzw. bei Fußbodenheizung 1,8 %, bei Anhydritestrich max. 0,5 % bzw. bei Fußbodenheizung 0,3 % Restfeuchte - gemessen mit CM-Geräten), eben, fest und sauber sein. Des weiteren müssen Unebenheiten von 3 mm/Erstmeter und 2 mm je weiteren lfd. M. in Anlehnung an DIN 18 202, Tabelle, 3, Zeile 4, ausgeglichen werden. Um Unebenheiten auszugleichen und einen gleichmäßig saugfähigen Untergrund zu erhalten, ist das Auftragen einer geeigneten Spachtelmasse in ausreichender Schichtdicke erforderlich. Wir empfehlen das technische Hinweisblatt 02 vom Zentralverband für Parkett und Fussbodentechnik und des BEB. Die dem Produkt beiliegenden Verlegehinweise zur vollflächigen Verklebung sind zu beachten.

www.blauer-engel.de/uz120

MeisterWerke Schulte GmbH behält sich das Recht vor, Änderungen in Bezug auf Material und Konstruktion vorzunehmen, wenn es der Verbesserung der Qualität dient.

MEISTER – eine Marke der MeisterWerke Schulte GmbH
Johannes-Schulte-Allee 5/59602 Rüthen-Meiste/GERMANY
Telefon + 49 2952 816-0/E-Mail info@meisterwerke.com/www.meister.com

URKUNDE

MeisterWerke Schulte GmbH
59602 Rüthen, Deutschland

wird aufgrund des Zeichenbenutzungsvertrages Nr. 44001 zur DE-UZ 120 Ausgabe 2025 das Recht verliehen, für das Produkt

MeisterDesign. pro DD 250

das nachstehend abgebildete Umweltzeichen als Ausweis für die besondere Umweltfreundlichkeit zu führen.

Bonn, den 06. Januar 2026

Geschäftsführer
RAL gGmbH

Bundesministerium
für Umwelt, Klimaschutz, Naturschutz
und nukleare Sicherheit

Umwelt Bundesamt

Jury Umweltzeichen

RAL gGmbH

ZERTIFIKAT / CERTIFICATE

Zertifizierte Produkte Certified products	**MeisterDesign.pro DD 250**
Produktart Product type	**Bodenbelag**
Hersteller / Vertrieb Manufacturer / Distributor	**MeisterWerke Schulte GmbH** **Johannes-Schulte-Allee 5** **59602 Rüthen-Meiste**
Zertifizierungsnummer Certification number	**0816-12339-015**
Prüfberichtsnummer Number of test report	**59333-A001-A005-L II** **59415-A002-L II** **59415-A002-eIL-G II**
Prüfumfang Test program	Laborprüfung auf gesundheitlich bedenkliche Emissionen und Inhaltsstoffe. Tested on hazardous emissions and components.
Prüfergebnis Test result	Die untersuchten Produkte erfüllen die Anforderungen des eco-INSTITUT-Label-Programms sowie der Prüfkriterien eIL 02.01 (03/2024) Fußböden und Paneele basierend auf nachwachsenden oder mineralischen Rohstoffen. Einzelheiten siehe zugehöriges Gutachten. The products tested meet the requirements of the eco-INSTITUT-Label programme and the test criteria eIL 02.01 (03/2024) Flooring and panels based on renewable or mineral materials. For further details see the respective report.
Gültigkeit / Überwachung bis Validity / Monitoring until	**08/2026**

Köln, 27.08.2025

eco-INSTITUT Germany GmbH
Schanzenstr. 6-20
Carlswerk 1.19
D-51063 Köln

Dr. Frank Kuebart

Nora Rasch

eco INSTITUT
TESTED PRODUCT
ID 0816 - 12339 - 015

eco-institut.de
eco-institut-label.de

INFORMATION ZUM ZERTIFIKAT

Die wichtigsten Fakten zum eco-INSTITUT-Label

- **Anerkanntes Qualitätssiegel** für Bau- und Einrichtungsprodukte, Möbel, Reinigungsmittel, Matratzen und Bettwaren
- **Empfohlen** von führenden unabhängigen Verbrauchermedien (z. B. WDR Haushalts-Check, Magazin ÖKO-TEST, label-online.de)
- Kennzeichnet Produkte, die **besonders schadstoff- und emissionsarm** sind
- Prüfumfang: **1. Dokumentenprüfung** (Volldeklaration), **2. Laborprüfung** (umfangreiche Untersuchungen auf Emissionen, Inhaltsstoffe und Geruch)
- **Gültigkeit: 2 Jahre**; jährliche Konformitätsprüfung; zur Verlängerung nach 2 Jahren komplette Neuprüfung erforderlich
- **Transparenz** beim Prüfablauf, bei den Prüfkriterien und den Kosten (weiterführende Informationen unter **www.eco-institut-label.de**)

Was deckt das Label ab bzw. wo wird es anerkannt?

Das Hauptmerkmal der eco-INSTITUT-Label-Kriterien ist die **ausführliche Liste von VOC-Emissionsanforderungen** für kritische Substanzgruppen und Einzelsubstanzen. Diese basiert unter anderem auf der jeweils aktuellen NIK-Wert-Liste des AgBB, umfasst aber auch die deutschen Innenraumrichtwerte RW I.

Die Emissionsprüfungen erfolgen gemäß EN 16516 i. d. R. nach 3 und 28 Tagen. Durch die strengen eco-INSTITUT-Label-Kriterien werden die Emissionsanforderungen an Produkte bei anderen **nationalen und internationalen Bewertungsprogrammen** abgedeckt bzw. anerkannt, wie z. B. ...

- ✓ **AgBB Schema Deutschland** (Ausschuss für die gesundheitliche Bewertung von Bauprodukten)
- ✓ **Landesbauordnungen/MVV TB Deutschland:** Anforderungen an bauliche Anlagen bezüglich des Gesundheitsschutzes (ABG)
- ✓ **Belgische VOC-Verordnung**
- ✓ **Französische VOC-Verordnung** Klasse A sowie **französische KMR-Verordnung**
- ✓ **Breeam** und **HQM International** (außer „paints & varnishes"): Hea 02 Indoor air quality
- ✓ **BVB Schweden** (Byggvarube dömningen): VOC emissions
- ✓ **Danish Indoor Climate Labelling**
- ✓ **DGNB International** (ENV1.2 – Risiken für die lokale Umwelt; 2018): Emissionsnachweis der Zeilen 6, 7, 8, 9, 11, 13, 20, 23, 47a, 48 – Neubau Gebäude und Innenraum Kriterienmatrix (Anlage 1) und der Zeilen 1 und 2 – Innenraum Kriterienmatrix (Anlage 2)
- ✓ **eco-bau Schweiz** (Kriterium Lösemittel)
- ✓ **EGGbi Europäische Gesellschaft für gesundes Bauen und Innenraumhygiene** (Zitat: „[...] umfangreichsten und völlig transparenten Kriterienkatalog aller Gütezeichen [...]"
- ✓ **EU Taxonomieverordnung (EU) 2023/2486** 7.1 Neubau, 7.2 Gebäuderenovierung, 5) Vermeidung und Verminderung der Umweltverschmutzung, Formaldehyd und krebserzeugende VOC
- ✓ **GOLS Global Organic Latex Standard**
- ✓ **Italienisches Green Public Procurement** (I Criteri ambientali minimi – CAM)
- ✓ **LEED v4.1** Option 2 und **LEED v4** for projects outside the U.S.; EQ credit low-emitting materials: VOC emissions requirements (bei Formaldehyd-emissionen nach 28 Tagen < 10 µg/m³)
- ✓ **QNG Qualitätssiegel Nachhaltiges Gebäude** (3.1.3 Schadstoffvermeidung in Baumaterialien): Teil- oder Komplettanforderungen an SVHC, VOC-Emissionen und Inhaltsstoffe Pos. 1, 2, 3.1, 3.2, 4.1, 4.2, 4.3, 4.5, 5.7, 5.8, 5.9, 6, 7.5, 9, 12.4
- ✓ **WELL International** (International WELL Building Institute)

Die Liste ist nicht abschließend.
Stand: November 2024

INFORMATION ON THE CERTIFICATE

The most important facts about the eco-INSTITUT label

- Recognised quality seal for construction and furnishing products, furniture, cleaning products, mattresses and bedding
- Recommended by leading independent consumer media (e.g. WDR Haushalts-Check, ÖKO-TEST Magazine, label-online.de)
- Identifies products that are particularly low in pollutants and emissions
- Test scope: 1. Document inspection (full declaration), 2. Laboratory testing (extensive tests for emissions, substances and odour)
- Validity: 2 years; annual conformity test; complete reassessment required for renewal after 2 years
- Transparency in the test sequence, the test criteria and the costs (further information at www.eco-institut-label.de)

What does the label cover and where is it recognised?

The main feature of the eco-INSTITUT label criteria is the detailed list of VOC emission requirements for critical substance groups and individual substances. This is based, among other things, on the current list of NIK values from the AgBB, but also includes the German Indoor Guide Values RW I.

Emission tests are usually carried out after 3 and 28 days in accordance with EN 16516. Due to the strict eco-INSTITUT label criteria, emission requirements for products are covered or recognised in other national and international evaluation programmes, such as …

- ✓ AgBB scheme Germany (Committee for Health-related Evaluation of Building Products)
- ✓ State Building Codes/MVV TB Germany: Requirements for structural installations regarding health protection (ABG)
- ✓ Belgian VOC regulation
- ✓ French VOC regulation Class A and French CMR regulation
- ✓ Breeam and HQM International (except „paints & varnishes“): Hea 02 Indoor air quality
- ✓ BVB Sweden (Byggvarube dömningen): VOC emissions
- ✓ Danish Indoor Climate Labelling
- ✓ DGNB International (ENV1.2 – Local environmental impact; 2018): Emission evidence from rows 6, 7, 8, 9, 11, 13, 20, 23, 47a, 48 – New buildings and interior criteria matrix (Appendix 1) and rows 1 and 2 – Interior criteria matrix (Appendix 2)
- ✓ eco-bau Switzerland (solvent criterion)
- ✓ EGGbi European Society for Healthy Building and Indoor Hygiene (quote: „[...] most comprehensive and completely transparent catalogue of criteria of all quality labels [...]“)
- ✓ EU Taxonomy Regulation (EU) Standard 2023/2486 7.1 New construction, 7.2 Building renovation, 5) Pollution prevention and control, formaldehyde and carcinogenic VOCs
- ✓ GOLS Global Organic Latex Standard
- ✓ Italian Green Public Procurement (I Criteri ambientali minimi – CAM)
- ✓ LEED v4.1 Option 2 and LEED v4 for projects outside the U.S.; EQ credit low-emitting materials: VOC emissions requirements (formaldehyde emissions after 28 days < 10 µg/m³)
- ✓ QNG German Quality label Sustainable Building (3.1.3 Prevention of pollutants in building materials): Partial or complete requirements for SVHC, VOC emissions and contents Pos. 1, 2, 3.1, 3.2, 4.1, 4.2, 4.3, 4.5, 5.7, 5.8, 5.9, 6, 7.5, 9, 12.4
- ✓ WELL International (International WELL Building Institute)

The list is not exhaustive.
Last updated: November 2024